

FRM4SM: SMOS validation strategy and uncertainty mapping



François Gibon^{1*}, Arnaud Mialon¹, Philippe Richaume¹, Yann Kerr¹, Nemesio Rodriguez-Fernandez¹, Ali Mahmoodi¹, Daniel Aberer², Alexander Boresch³, Wouter Dorigo², Irene Himmelbauer², Wolfgang Preimesberger², Pietro Stradiotti², Monika Tercjak³, Raffaele Crapolicchio⁴, Roberto Sabia⁴

¹ CESBIO, Université de Toulouse, CNES/CNRS/INRAe/IRD/UPS, Toulouse, France
² Technische Universität Wien, Department of Geodesy and Geoinformation, Vienna, Austria
³ Applied Science, Software and Technologie (AWST) gmbh, Vienna, Austria
⁴ ESRIN - ESA Center For Earth Observation, Frascati, Italy
 * francois.gibon@univ-tlse3.fr




1.Context

Fiducial Reference Measurement for Soil Moisture (FRM4SM) is an ESA project focusing on the validation strategy of satellite based soil moisture. In this context, a partnership between the reference network ISMN (TUWIEN), the validation platform QA4SM (AWST) and the SMOS team (CESBIO) is conducted to investigate: the different validation strategies (spatial sampling, temporal aliasing), evaluate the SMOS performance regarding different validation conditions, quantify errors due to the spatiotemporal difference SMOS vs. *in-situ*...

2.Objectives

- Better understand and represent the SMOS SM uncertainties
- Quantify on SMOS performances of:
 - the probes set-up;
 - the SMOS footprint content;
 - the geophysical process scale difference.

Comparison of SMOS vs. ISMN

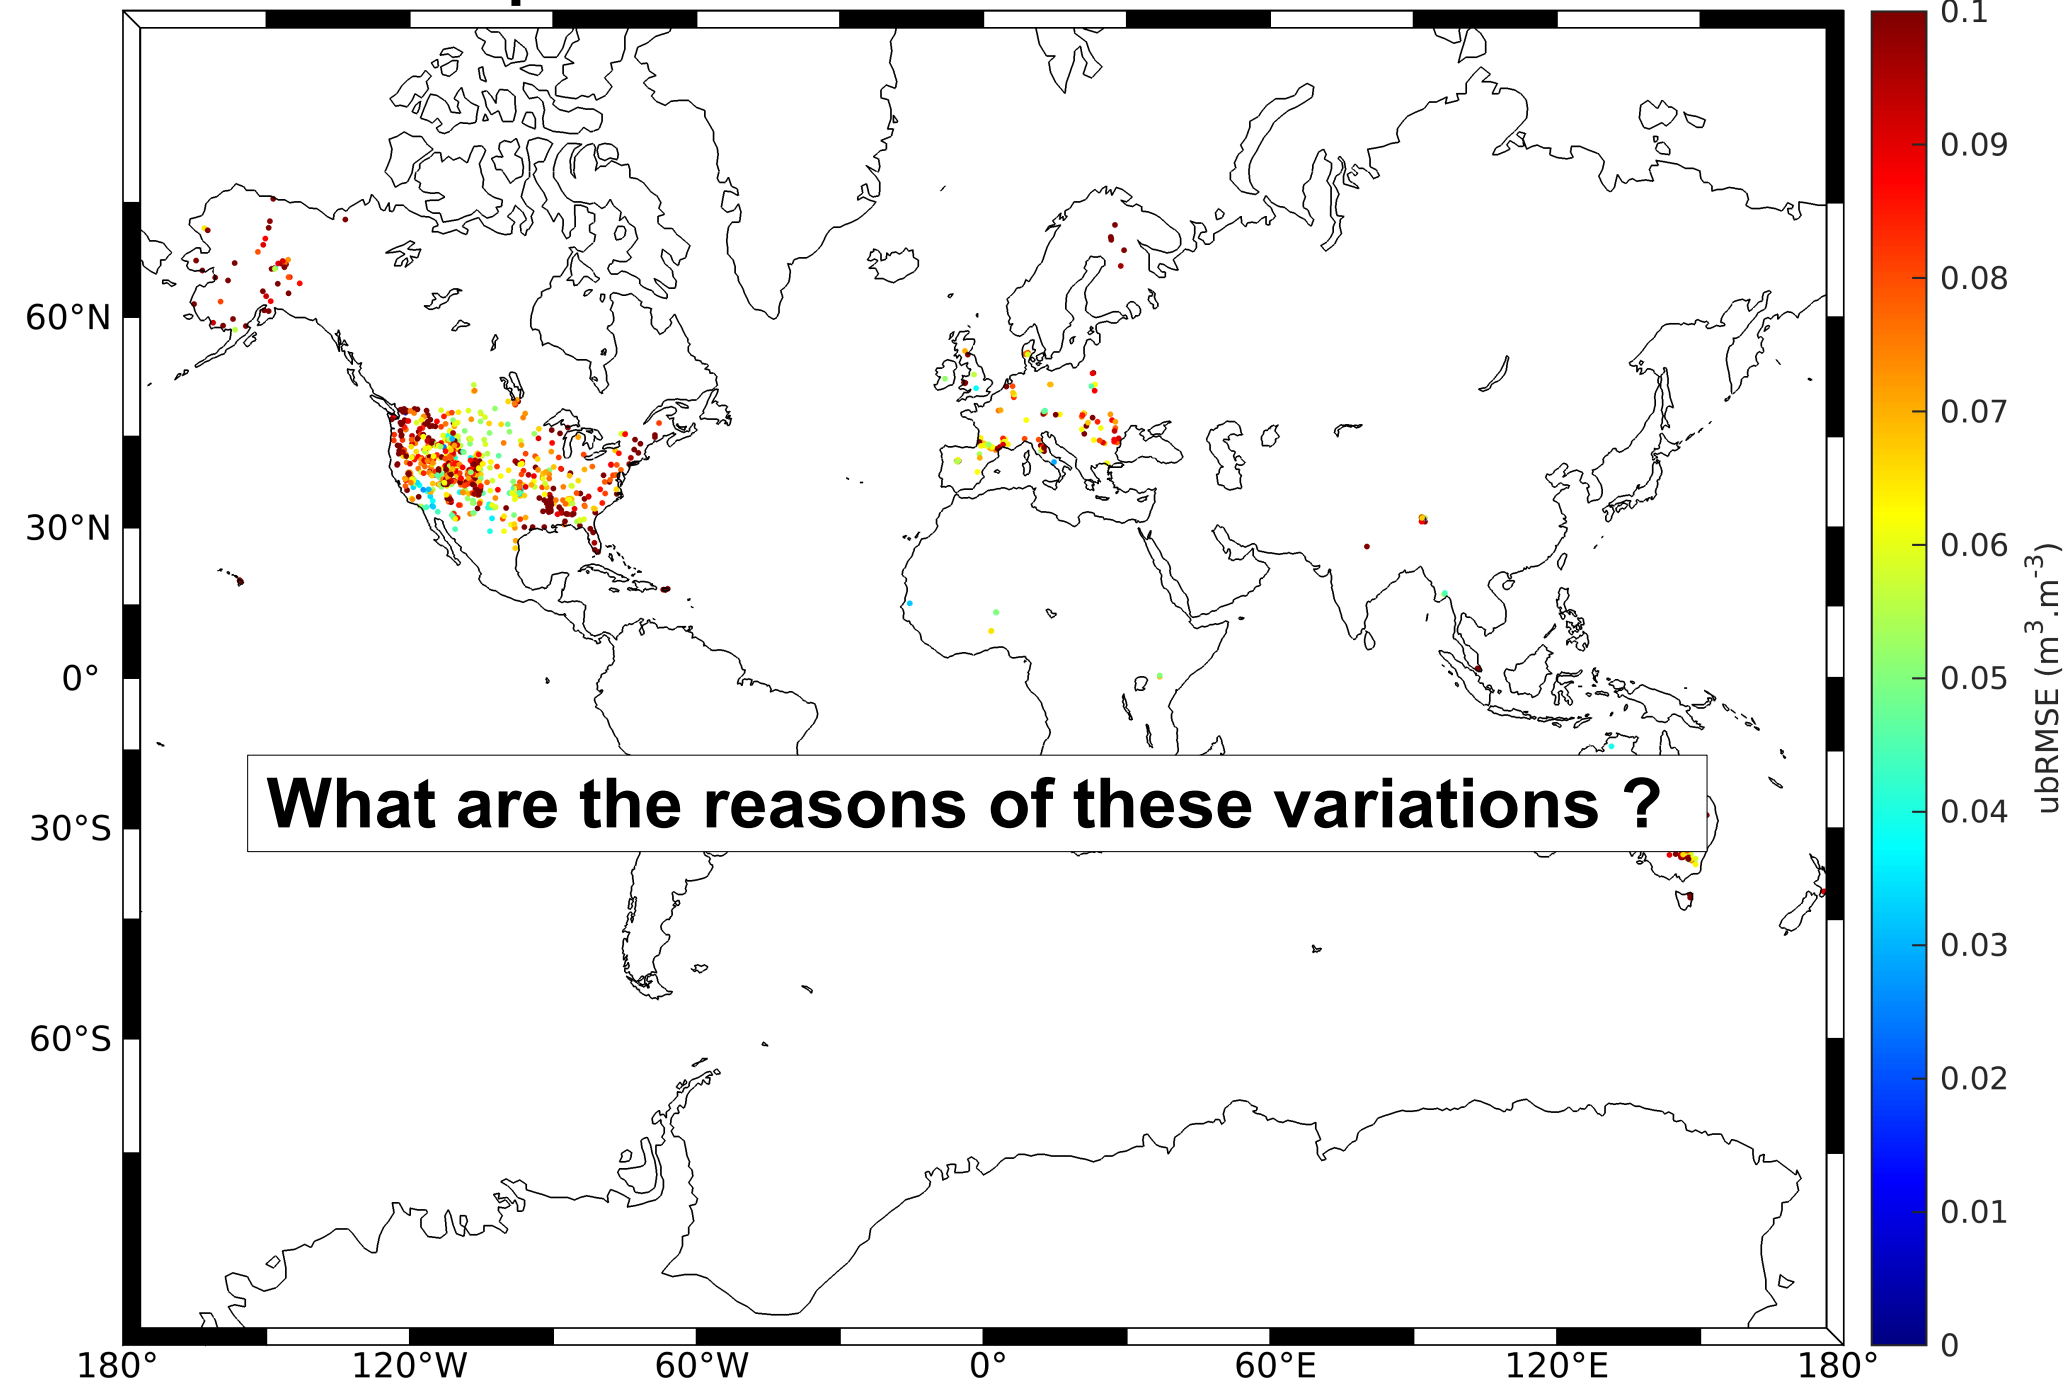


3.Data & methods

- One aim of this project is to evaluate the SMOS Level 2 v700 soil moisture product with the ISMN network used as ground reference (see table →)

Data	Spatial resolution	Temporal resolution	Potential validation issues
SMOS L2V700	Ø43km in average	2/3days	Sensitive to the footprint content, RFI
ISMN	cm² to m² depending on the technology, location	~min	Quality of the calibration, Installation, technology representativeness

- To quantify the agreement between SMOS and the ISMN network a validation process is proceeded as follows:

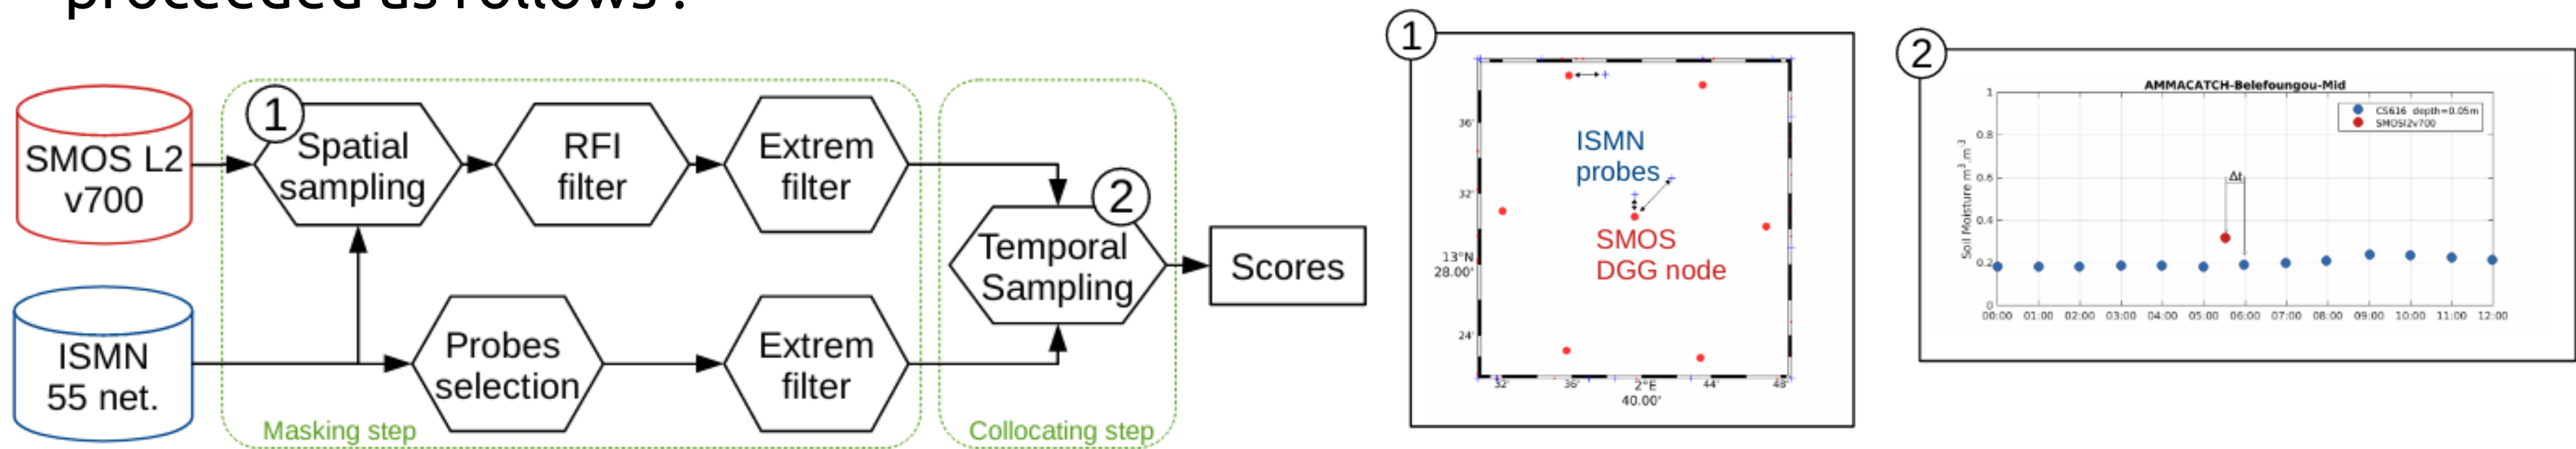

With ① the spatial collocation between the *in-situ* probes and the SMOS node defined as the nearest neighbor, and ② a limit of $\Delta t \leq 30$ min for the time collocation of the two data.


- The statistical scores (R, RMSE, bias, ubRMSE) are analysed according to:

- Probes depth influence;
- SMOS footprint content influence;
- Relations were defined between the surface conditions and the validation scores in order to map range of expected uncertainties

4.Results & discussions


a) Probes depth influence

- The analyses of the scores as a function of the probes depth show a better agreement when the probes are within the first 10 centimeters of the soils, in respect to L-band soil penetration.

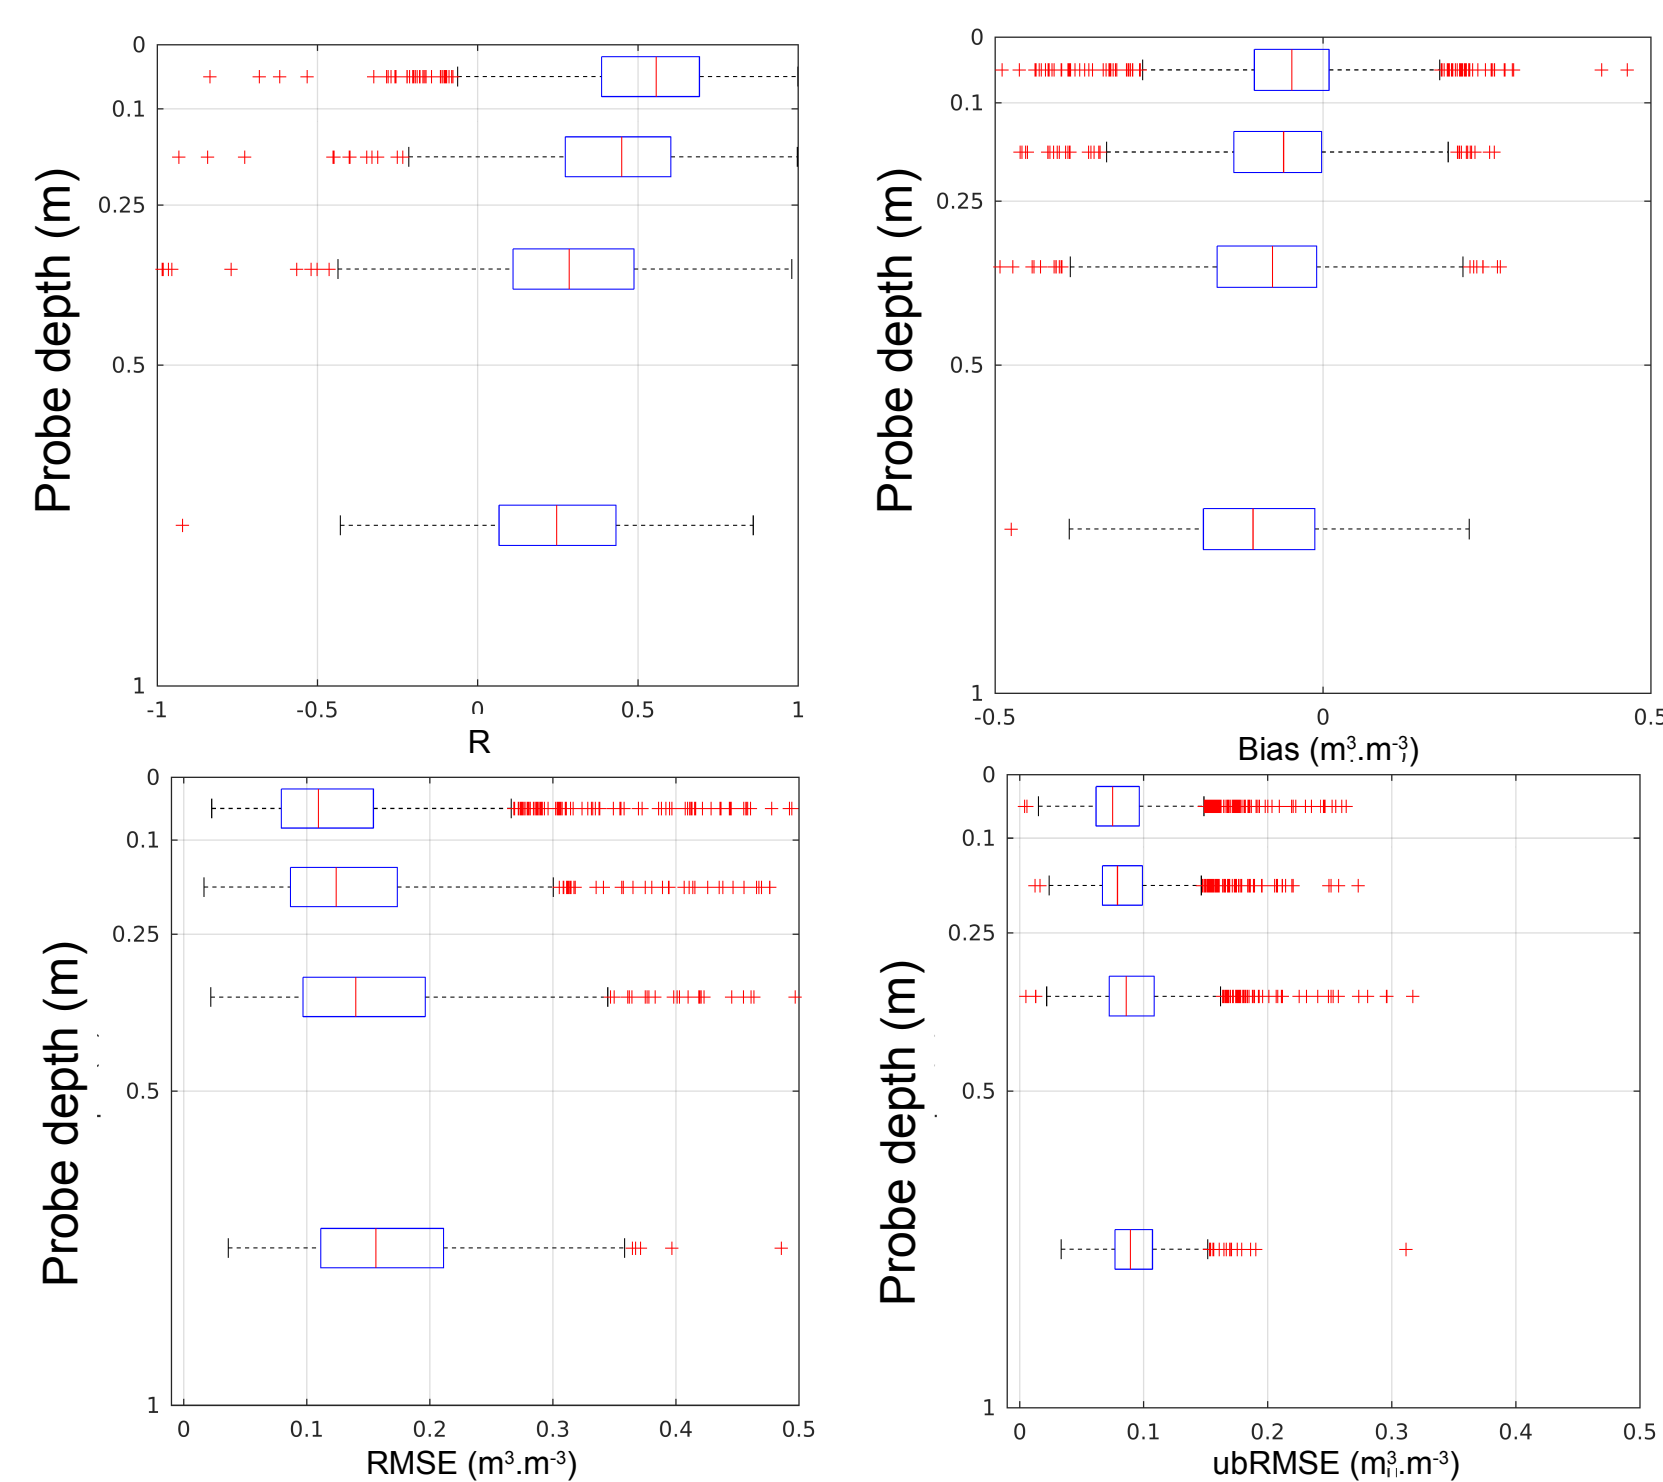



b) SMOS footprint content influence

- Each validation scores are related to a specific surface conditions, described using the auxiliary database of the SMOS L2 processor →
- The analyses ↓ show scores performances improvement when the footprint contains a minimum of vegetation, topography, and water, and when the soil has more sand than clay and with a high bulk density. The regressions defined here are used to derive the global maps on c).

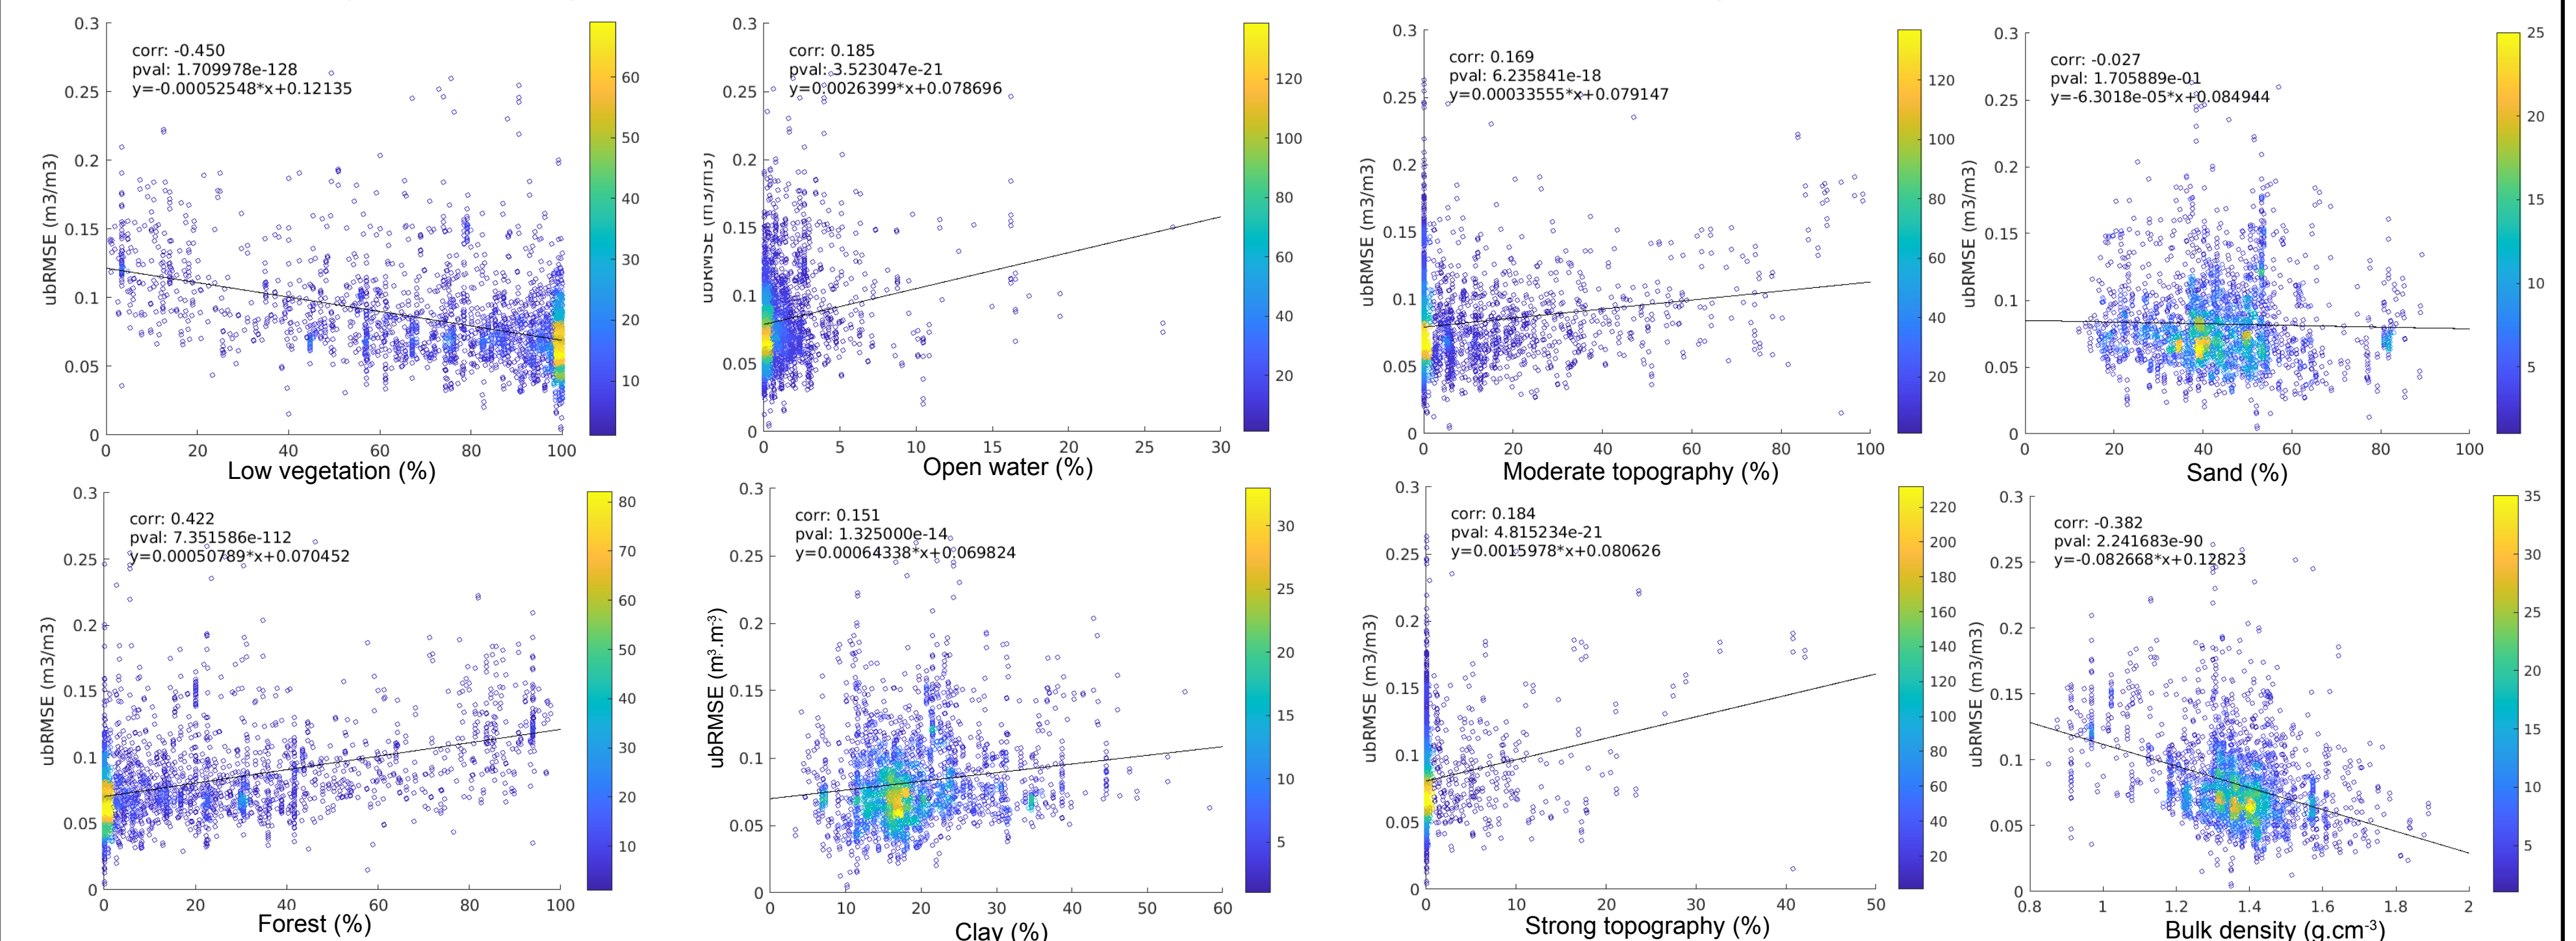

c) Maps of expected uncertainties

- The relations in b) are used to derive a map of expected ubRMSE as a function of the surface conditions (mean ubRMSE in i) and std in ii)).
- On map i) yellow areas are expected with better SMOS uncertainties (ubRMSE) than the red ones (and with more confidence, as shown map ii)).

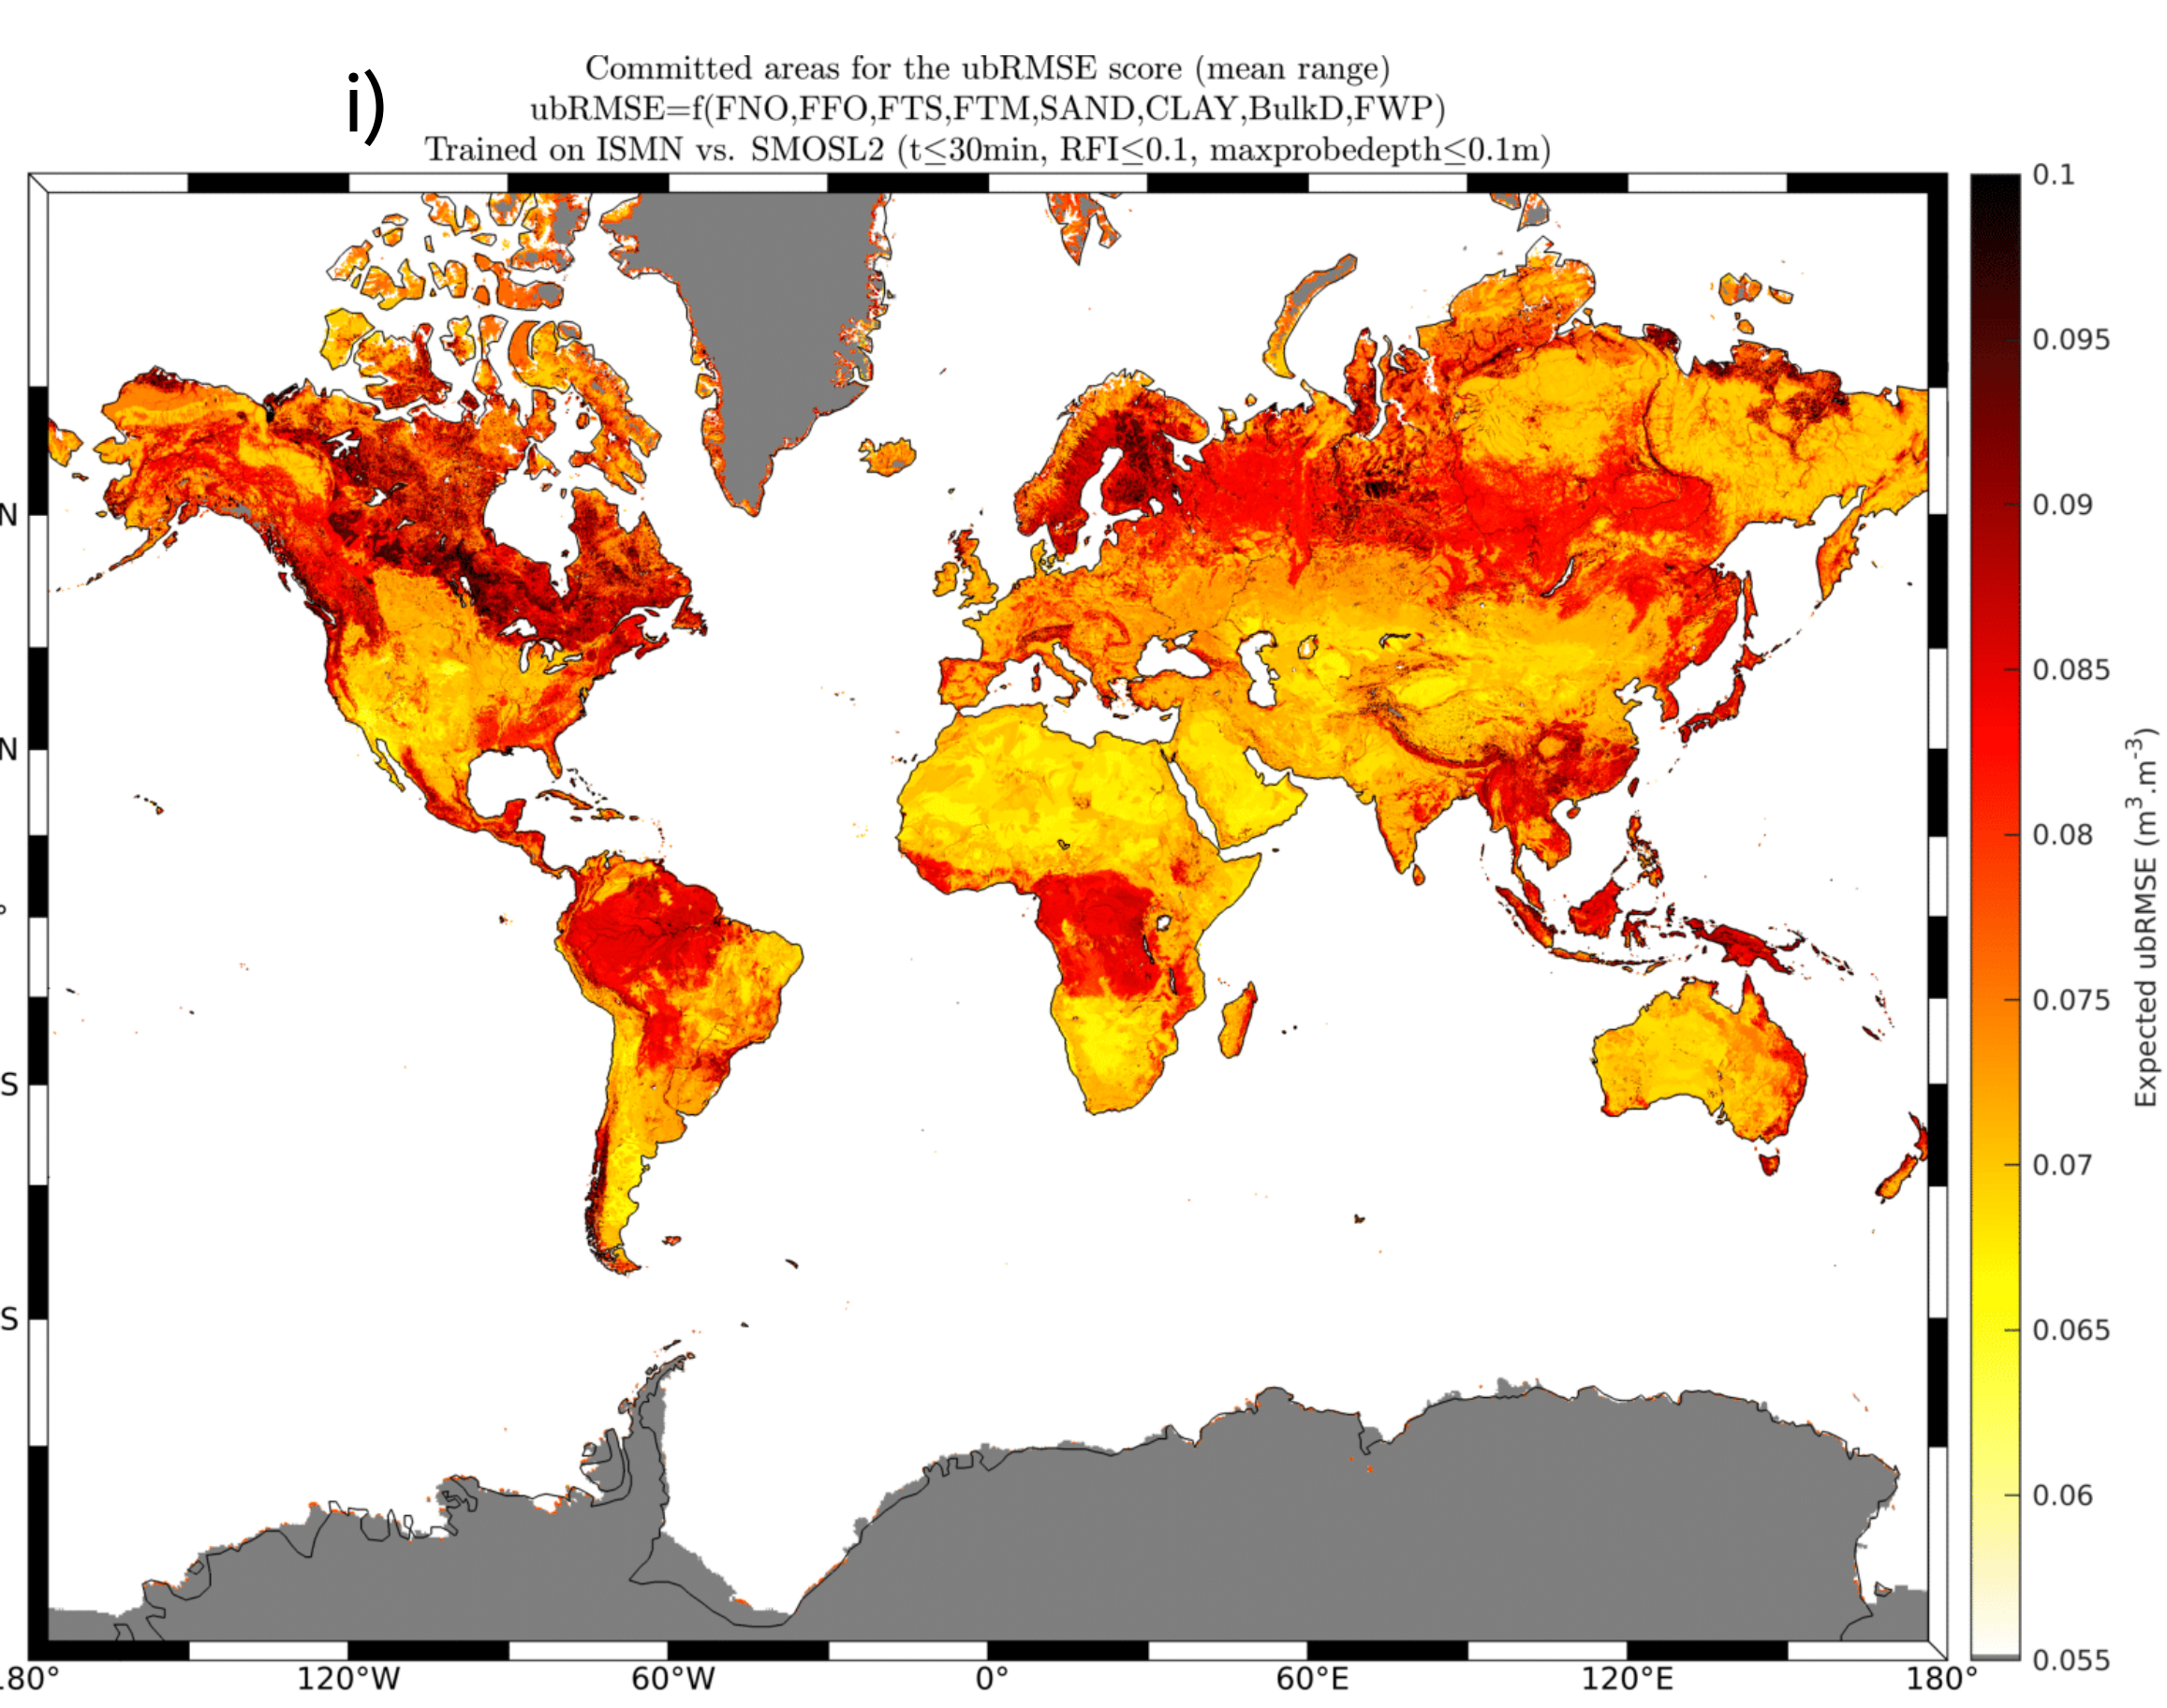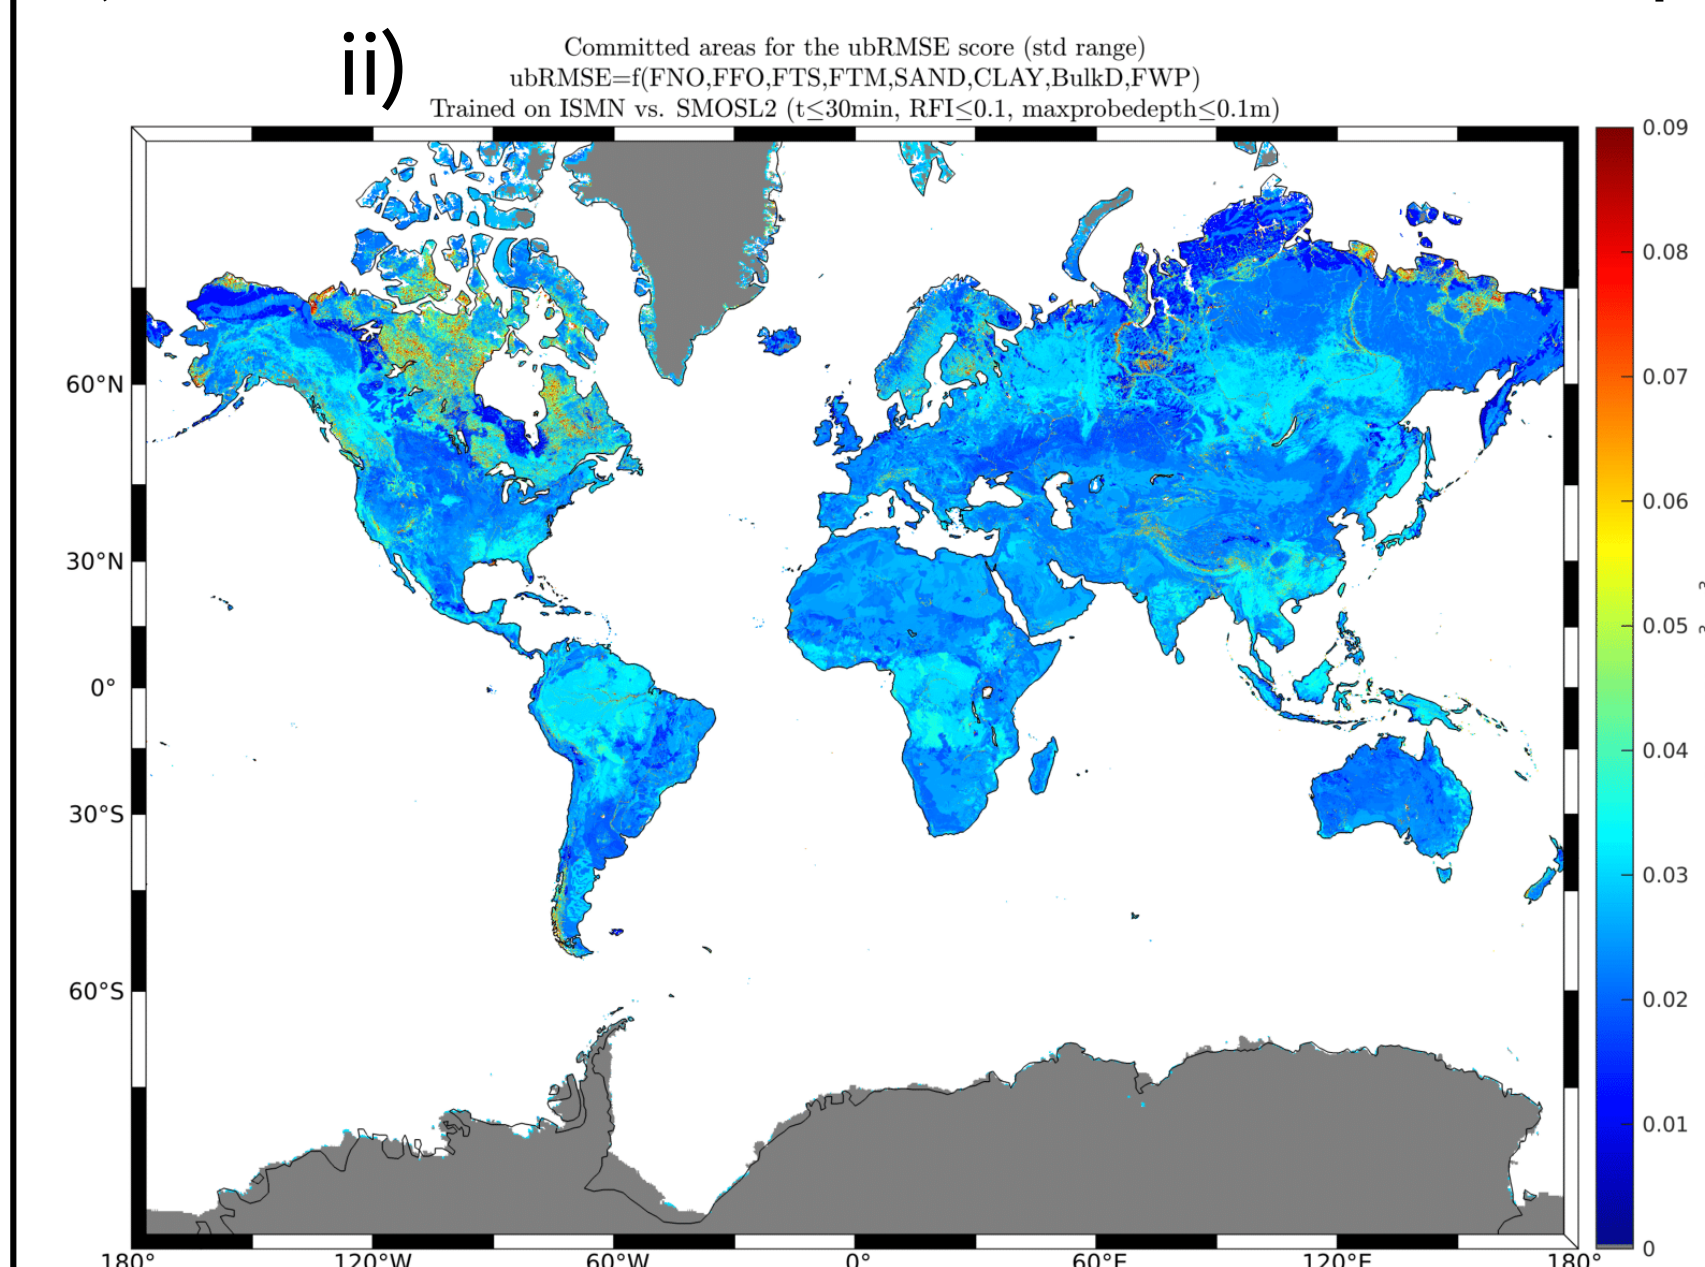

5.Take home message

- SMOS performance assessment is sensitive to the *in-situ* probe set-up and surface conditions in the footprint.
- SMOS and all microwaves SM missions pretend to reach 4-5% uncertainties. The surface conditions to reach this performance are limited to: low vegetation, no topography, no water, high bulk density and sandy soil.
- This is the first study to evaluate the uncertainties of SMOS SM at global scale.

6.Reference

- Gibon et al. 2022, *How the validation conditions affect the evaluation of satellite-based soil moisture? the SMOS and ISMN case study*, in prep.