




**SENTINEL 2**  
*Mission Performance Centre*



# SENTINEL 2 RADIOMETRIC CALVAL

S. CLERC, B. ALHAMMOUD, B. PFLUG, B. LAFRANCE, M. NEVEU VAN  
MALLE, J. LOUIS, C. BOUZINAC, L. PESSIOT, R. IANNONE, V. BOCCIA

- ➔ Sentinel-2 is designed as a quantitative remote sensing mission
  - › Create consistent time series of surface reflectance measurements for applications such as:
    - Vegetation monitoring
    - Land cover classification and change detection
    - Etc.
  
- ➔ To achieve this goal we need:
  - › Accurate and stable radiometric accuracy at TOA
  - › Accurate surface reflectance (BOA) retrieval
    - Based on Sen2cor atmospheric correction processor
    - Production started worldwide end of 2018
    - New evolutions planned in the near future
  - › Uncertainty estimates
    - Current provided by the Radiometric Uncertainty Tool at L1C

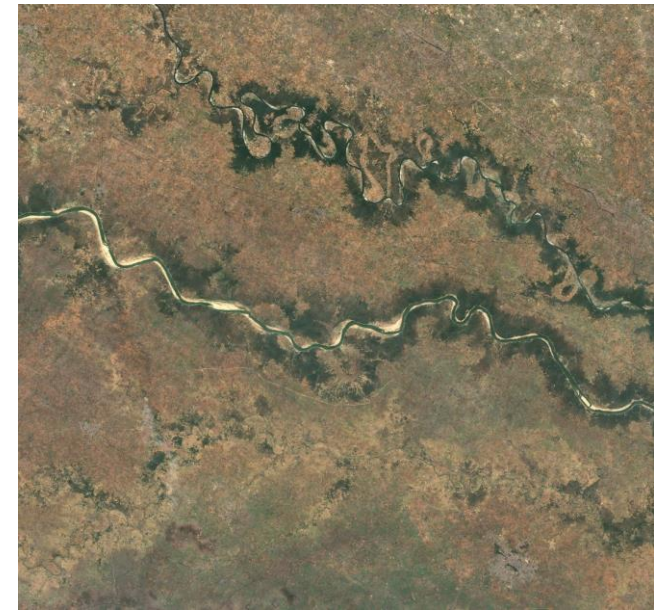


Agra, Uttar Pradesh

## → L1C (TOA) requirements

- › Defined by Mission Requirement Document
- › Absolute radiometric accuracy better than 5% (target 3%)
- › Stability better than 1%/year
- › Inter-band relative accuracy better than 1%

## → L2A (BOA) requirements

- › Target defined by MPC:
- › Uncertainty better than  $0.05 R_{\text{ref}} + 0.005$

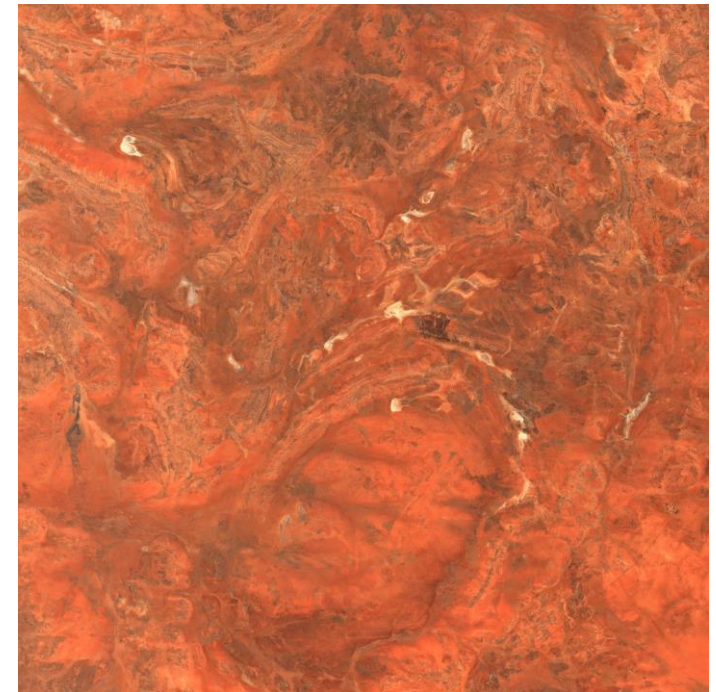


Western Australia


## ➔ On-board calibration device

- › White solar diffuser (single unit)
- › Used as reference reflectance for gains adjustment and equalisation (flat-fielding), and to monitor pixel health status

## ➔ Dark signal calibration using night-time Ocean acquisitions


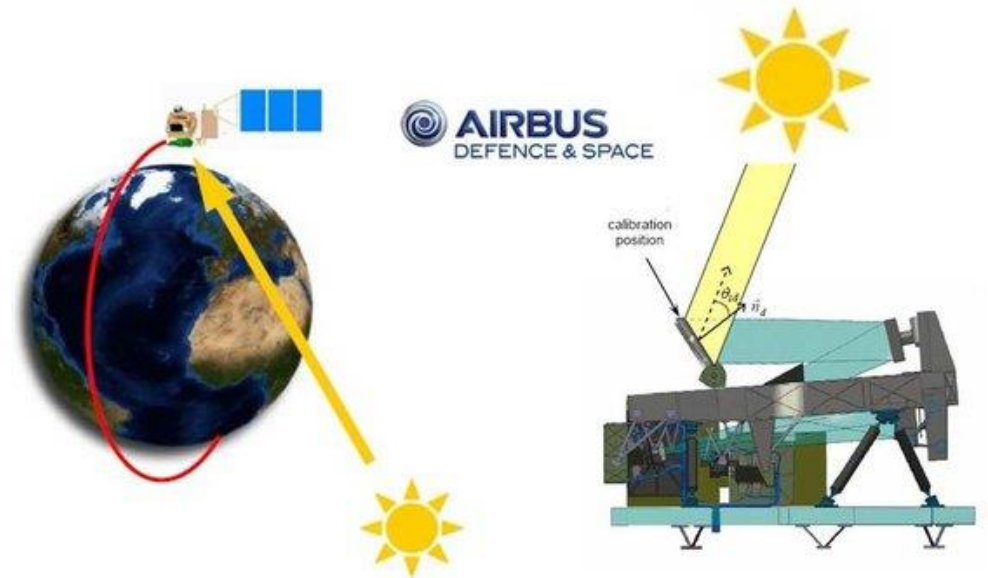


- Radiometric calibration activities led by MPC/CS
- Example diffuser image

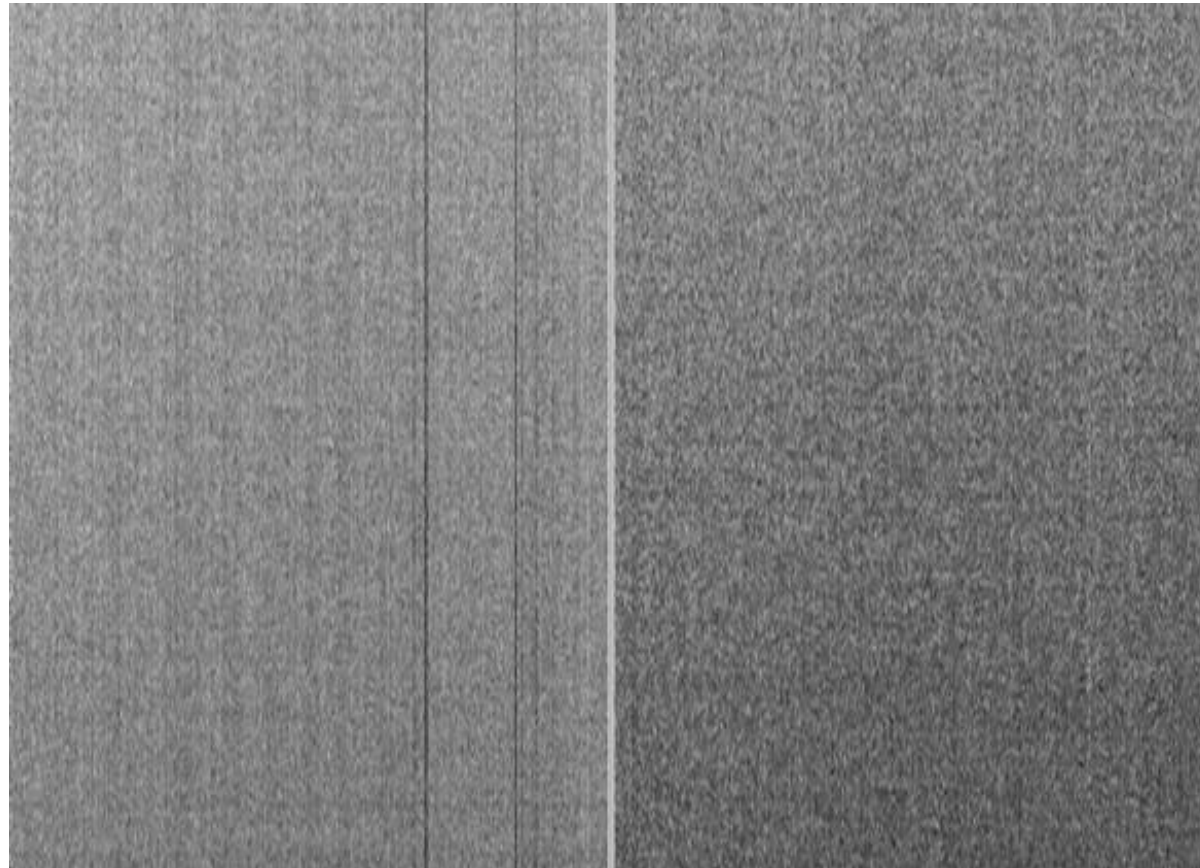


Diffuser image: before (left) and after (right) equalization

- ➔ Calibration operations are performed routinely once per month for Sentinel 2A and 2B
  - › Faster degradation of the absolute gains for SWIR bands (B10 & B11) due to ice contamination
- ➔ Periodic focal plane decontamination
  - › Recovers nominal sensitivity of SWIR bands
  - › Periodicity changed from 6 months to one year

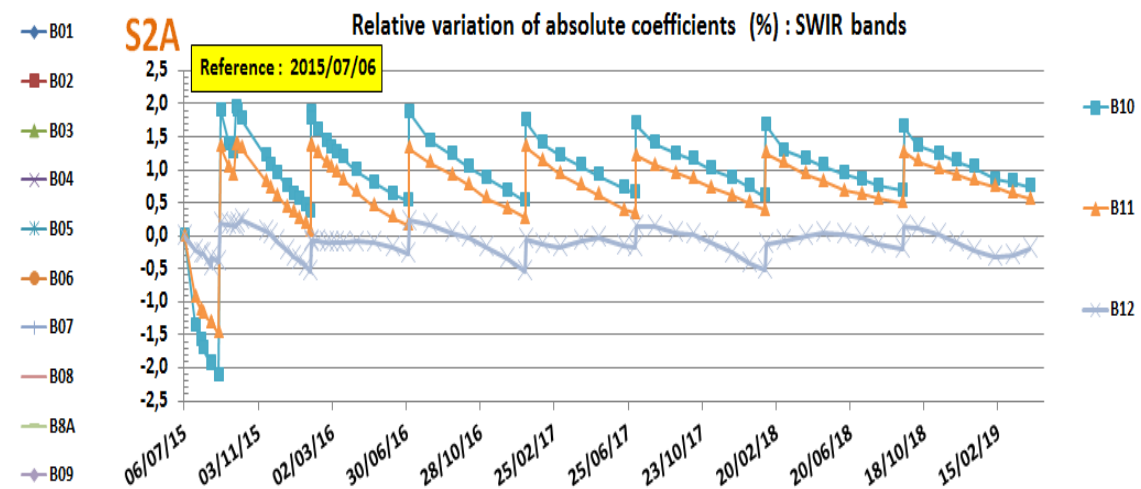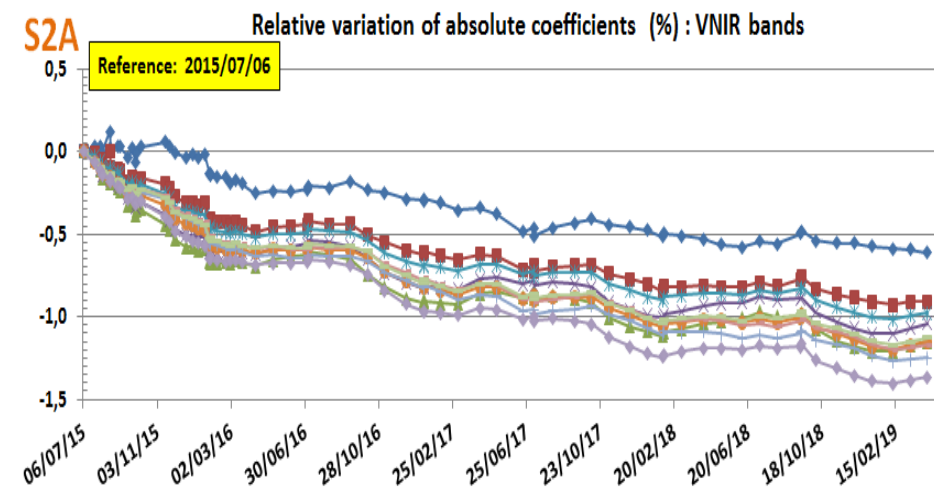

➔ Radiometry is continuously monitored using different methods by MPC/ARGANS implemented in DIMITRI software:


- › Rayleigh
- › PICS
- › In-situ (RailRoad Valley data provided by NASA/U. Arizona)
- › Cross-mission comparisons
- › Ad-hoc methods for inter-band: DCC, Sun-glint

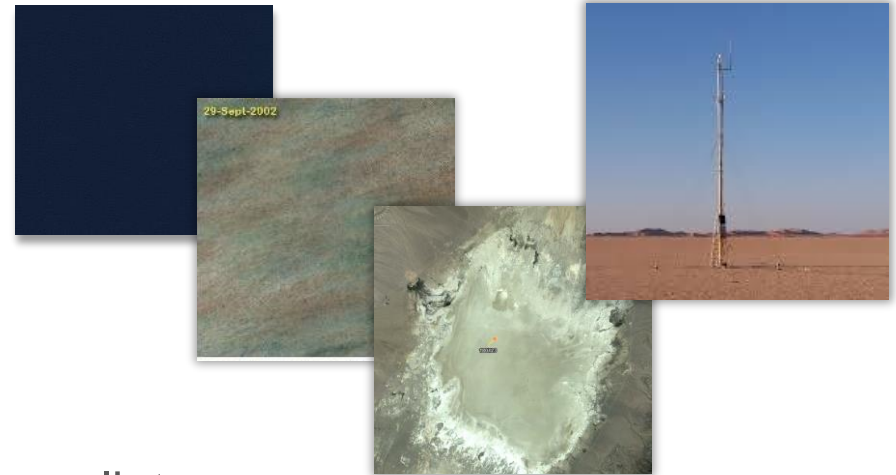

➔ Estimated performance:


- › S2A and S2B are meeting the requirements (goal value 3%) for all bands
- › Temporal stability is excellent  $\ll 1\%$ /year for all bands
- › Inter-band performance better than 1% (TBC)
- › Indication of a small systematic bias between S2A and S2B:  $\sim 1\%$  (S2B darker)

## ➔ Validation results: S2A

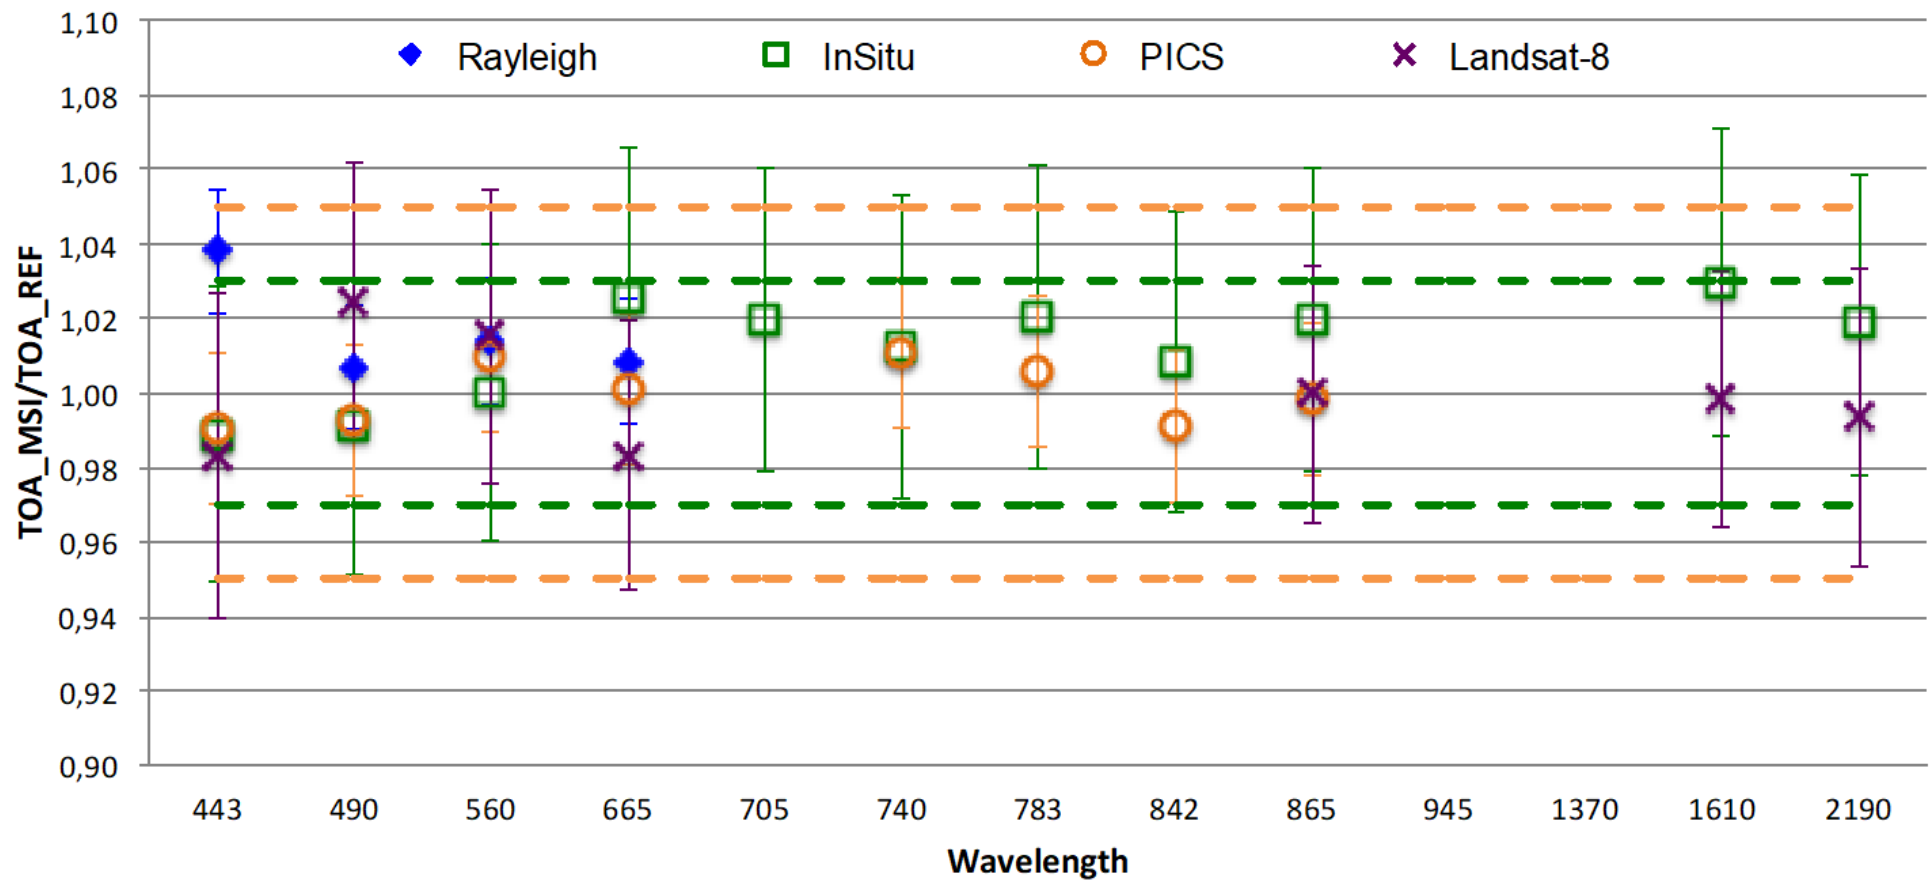




## ➔ Validation results: S2B

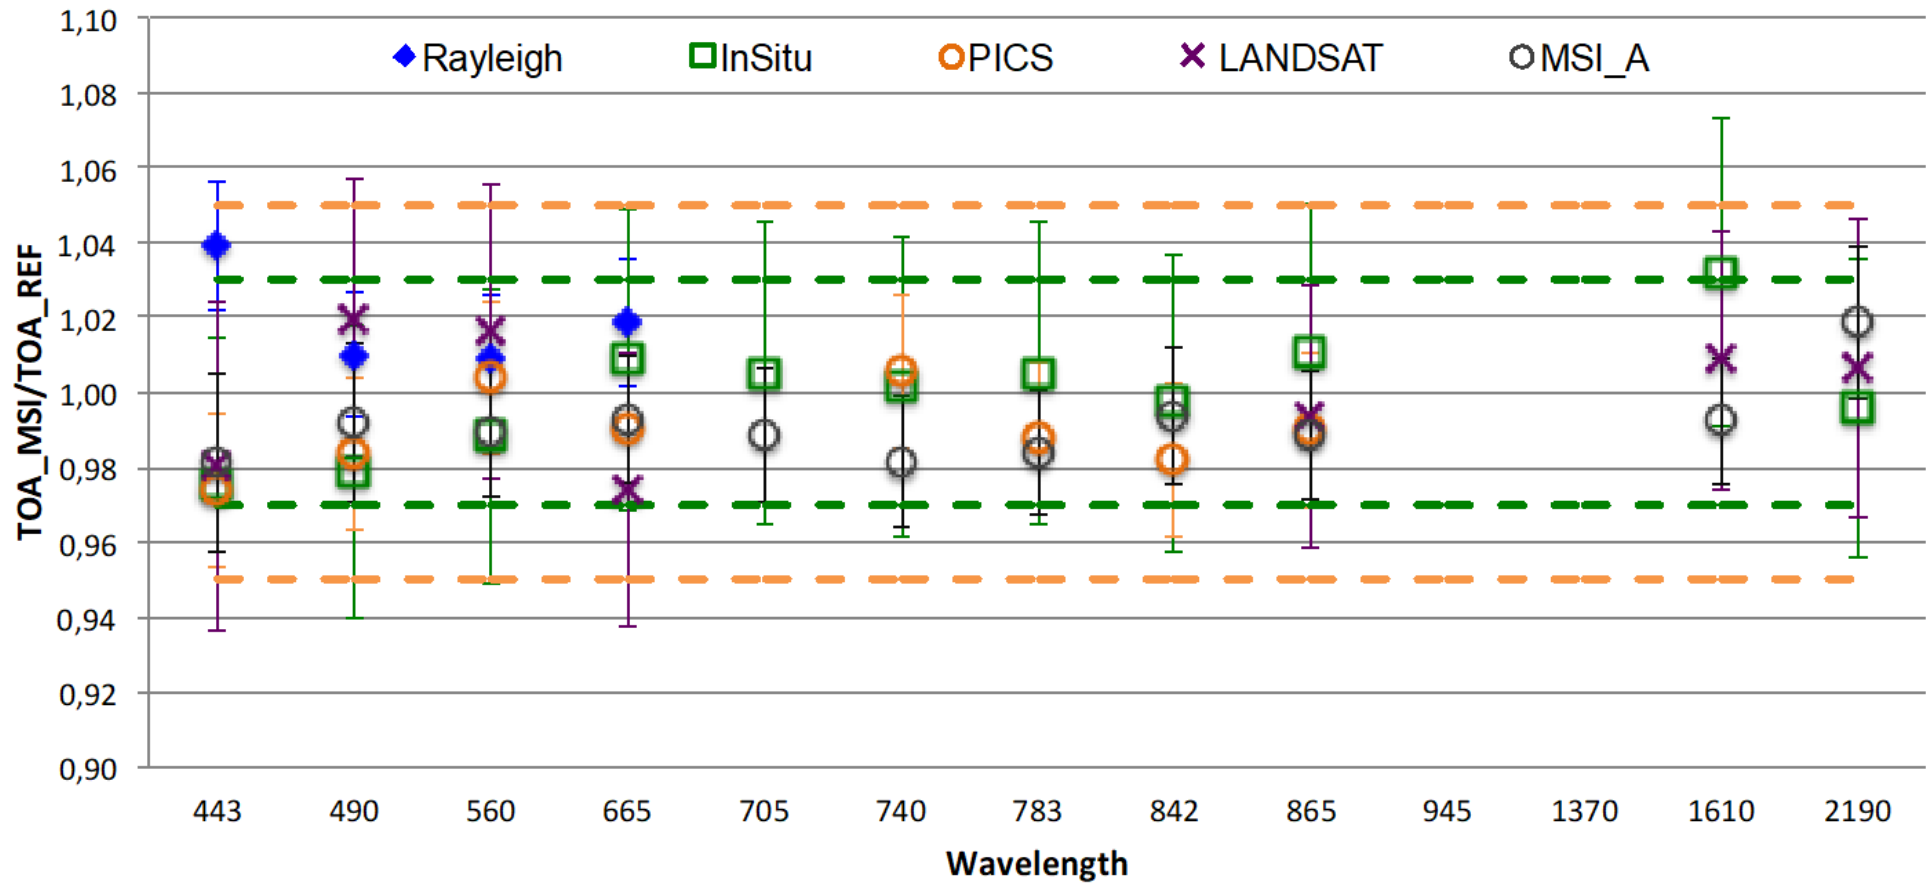


➔ Desert-PICS Method: X-mission intercomparison (LIBYA4)

MSI-A/MSI-B

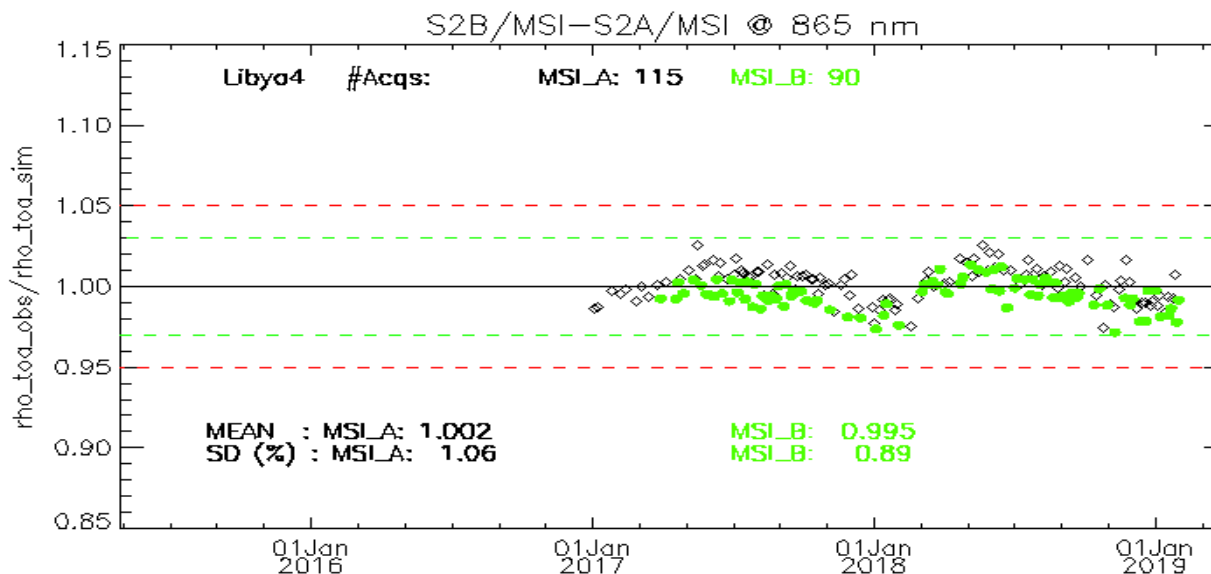


MSI-A/OLI

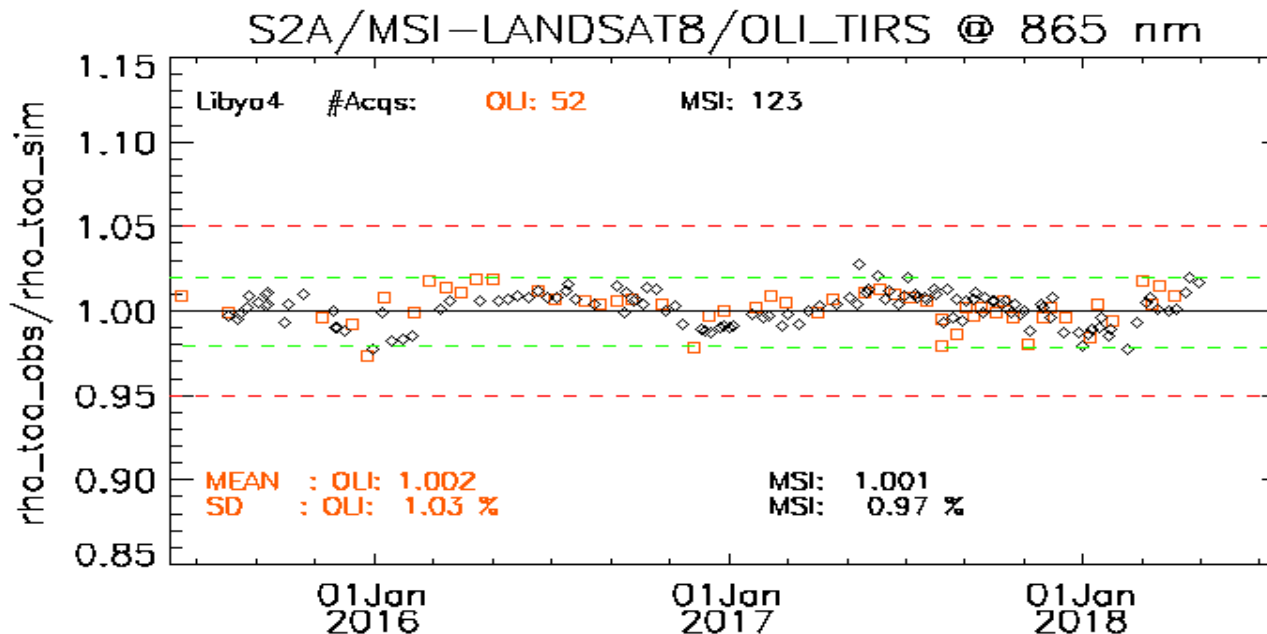

- ➔ Surface Reflectance Radiometric validation led by MPC/DLR
- ➔ Methods & approaches:
  - › “ACIX-like” validation: comparison with 6S inversion using AERONET measurements
  - › Ad-hoc ground measurement campaign: Lake Stechlin, May 2018
    - Analysis in progress
- ➔ Performance estimation status
  - › ACIX-like approach
    - Accuracy is acceptable but relatively large bias observed
    - Applied on previous version of the L2A processor: update needed (ACIX-2)
    - Poor performance on B05 and B12 bands not confirmed by ground measurements: methodology issue ?
  - › Field campaign
    - Good performance both on water and grass
  - › Airborne measurements
    - Analysis in progress


## ➔ Surface Reflectance Radiometric validation wrt 6S+AERONET reference

- › Accuracy is satisfactory; B05 and B12 degradation not confirmed by other methods
- › Total uncertainty hampered by relatively poor precision

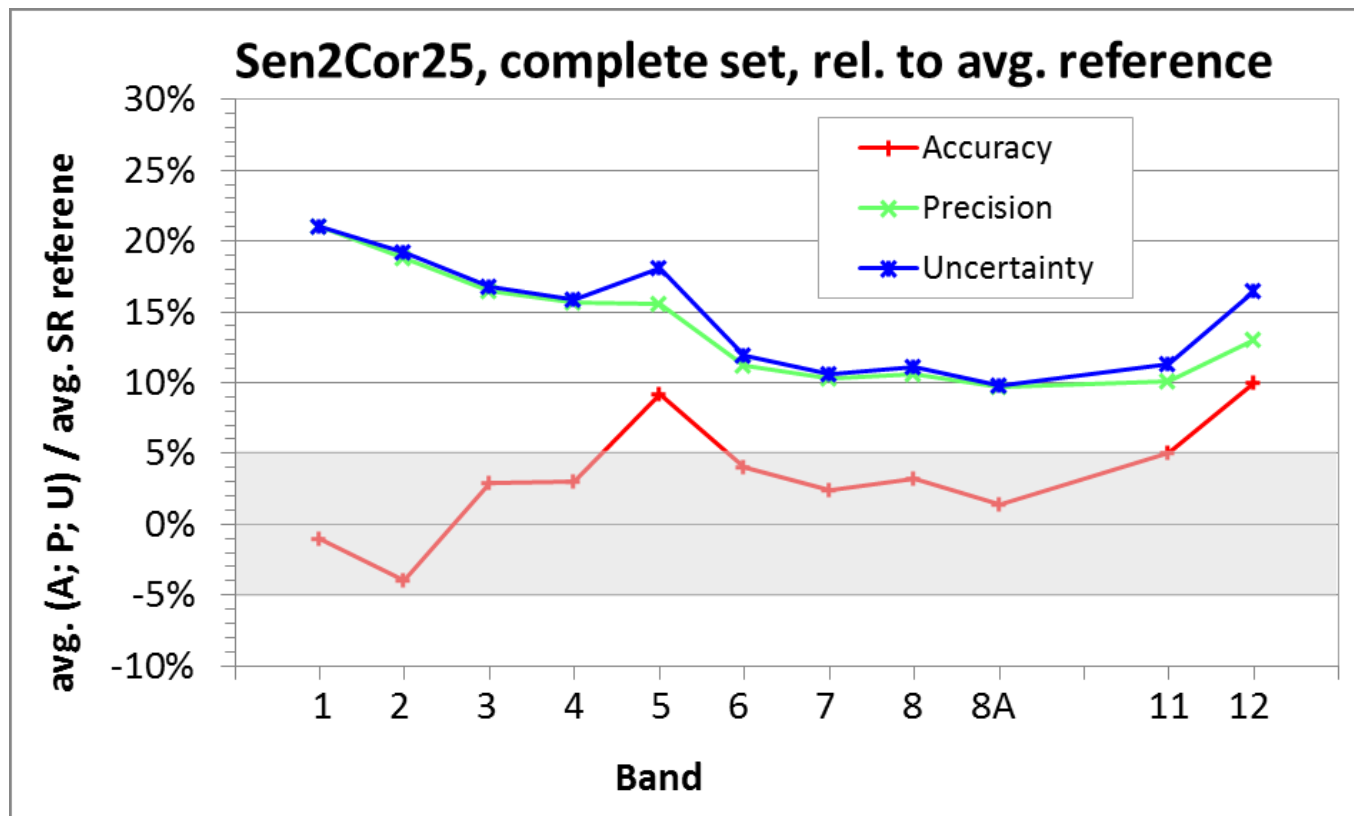



## ➔ Lake Stetchlin campaign 4<sup>th</sup> May 2018

- › Field campaign + aerial acquisition with HySpex instrument

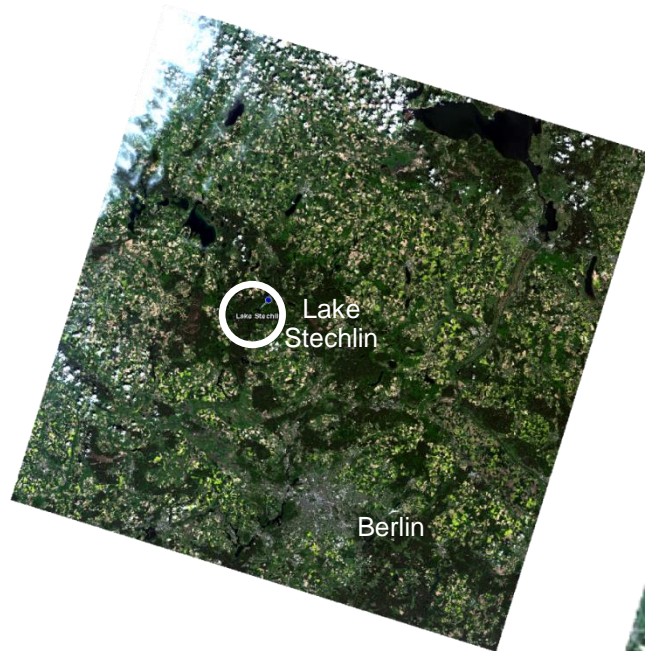


Landsat 8 over-pass  
10:02

Sentinel-2B over-pass  
10:10

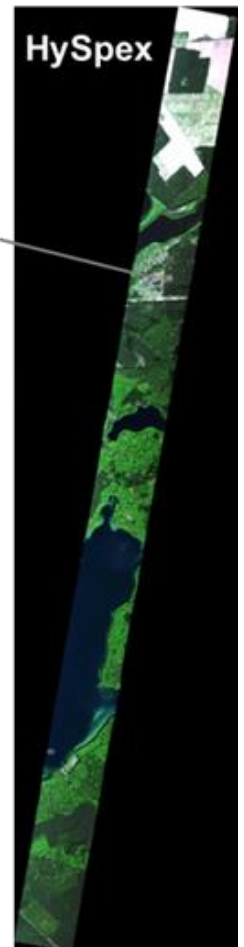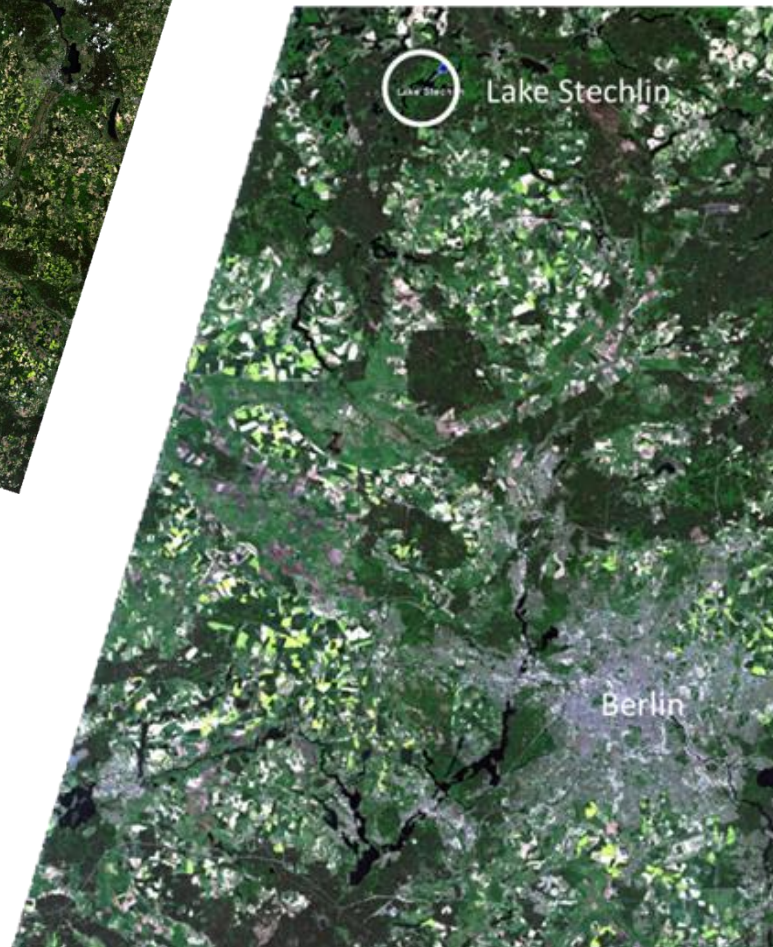


## ➔ Field measurements over meadow (grass)

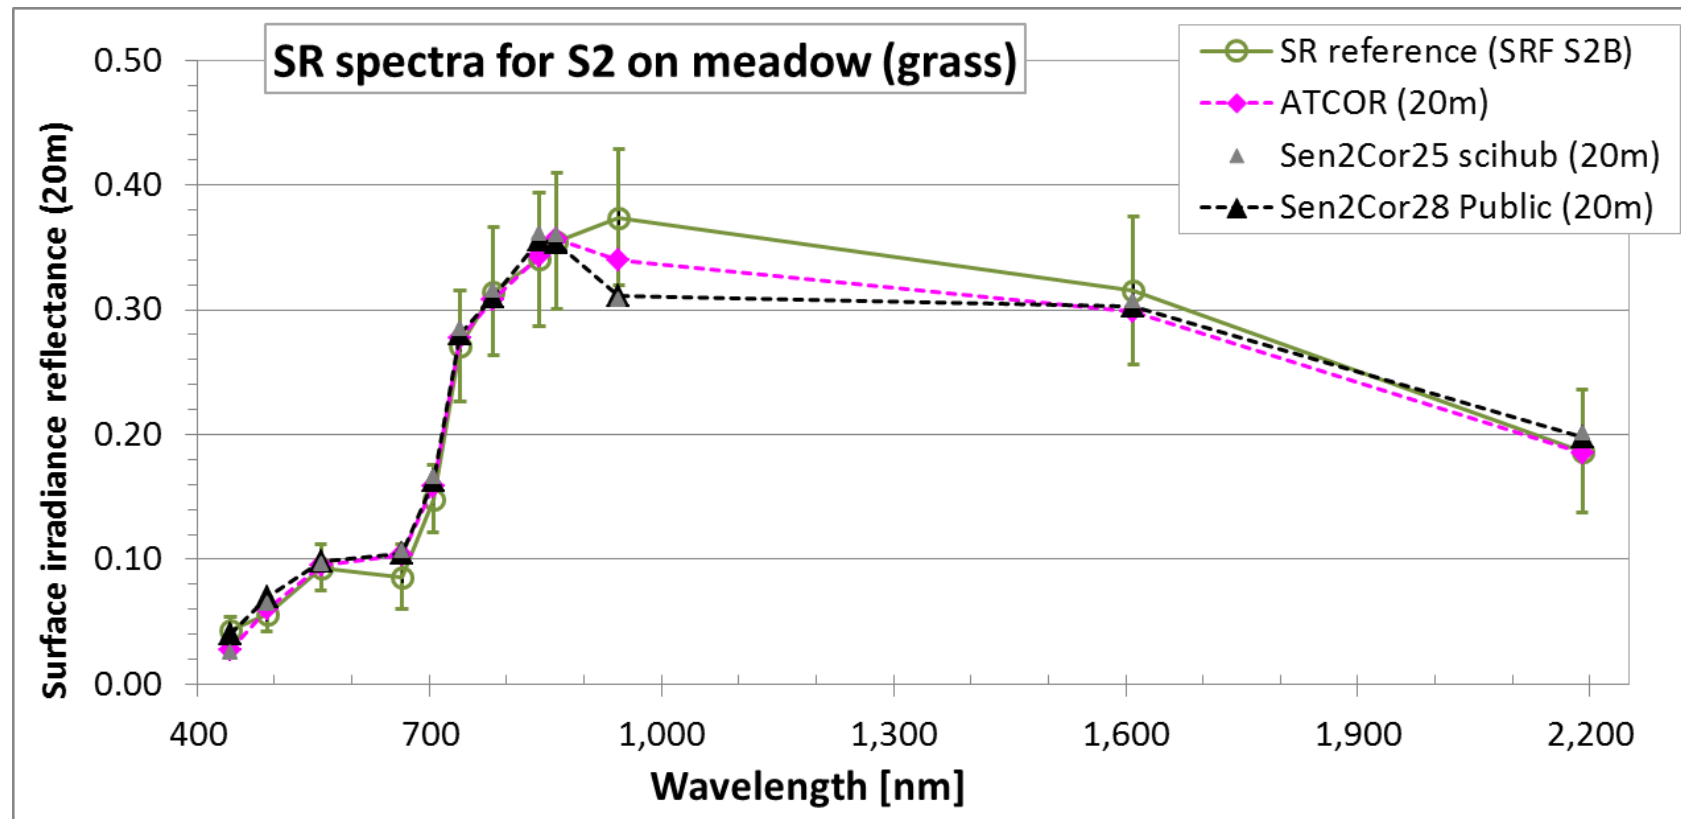

## ➔ Good agreement for all bands, except B09 (impact of water vapour)

## → Field measurements over lake (water)

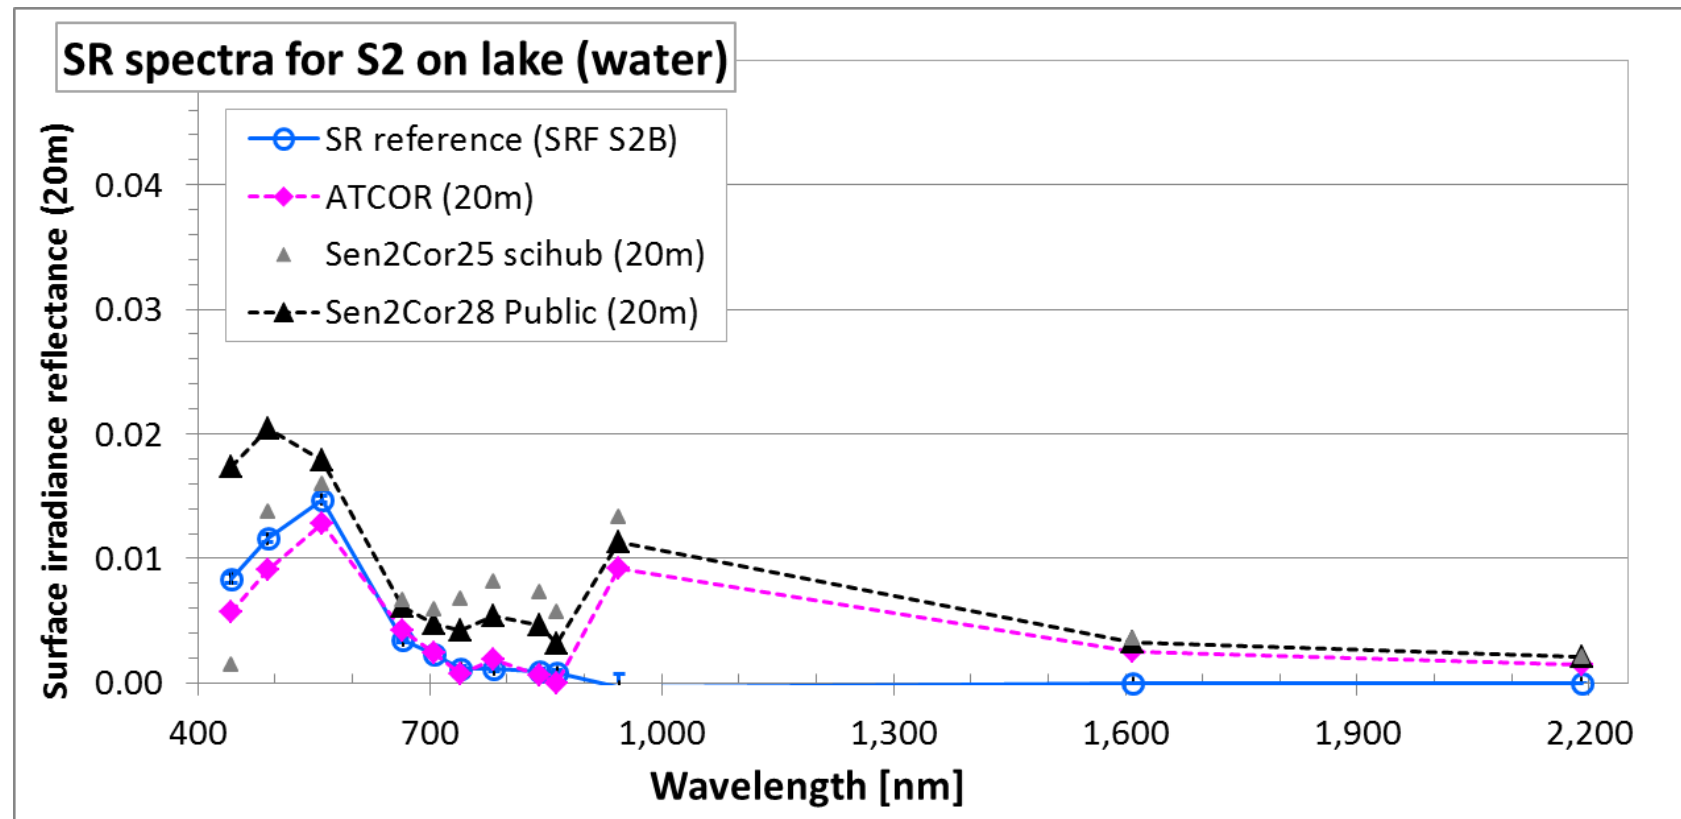

→ Good agreement for all bands, except B09 (impact of water vapour)

→ Spectral shape is less well captured


→ Differences between processors due in part to processing options

## ➔ Sentinel-2 Radiometric Calibration and Validation status

- › The radiometric performance of Sentinel-2 is excellent, in terms of accuracy, uniformity and stability
- › Sentinel-2 has become a reliable reference sensor in the VIS/NIR/SWIR range

## ➔ Can we go further ?


- › Perspectives and lessons learned....

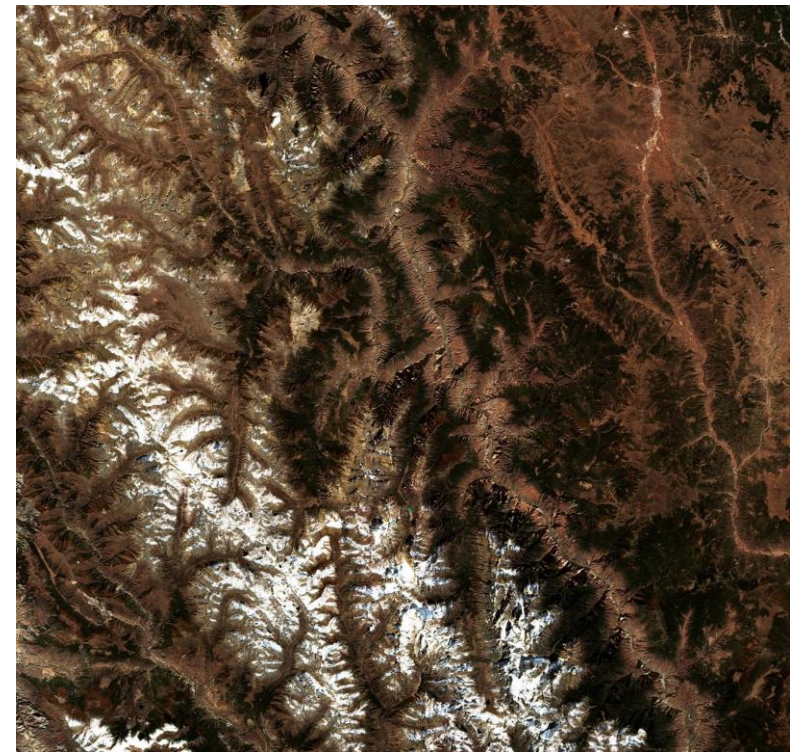


Chamdo City, Tibet



- ➔ A systematic difference of  $\sim 1\%$  is observed between S2A and S2B
  - › Difficult to measure this bias accurately using conventional validation methods
  - › Sentinel-3 Tandem showed that an inter-calibration with better than 0.5% accuracy is possible
- ➔ Comparison with other satellites limited by spectral adjustment and atmospheric effects
  - › Sentinel-2 is a broad-band sensor with irregular SRF: limits accuracy of inter-comparison
  - › Look for “white” targets and limit atmosphere effects (Moon, FLARE mirrors, Deep Convective clouds...)
  - › “Transfer” reference sensor (TRUTHS, CLARREO...)

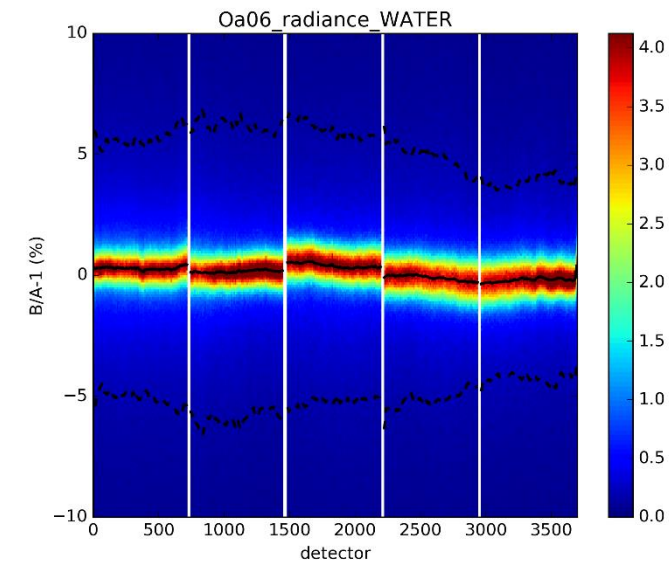

S3 OLCI inter-calibration

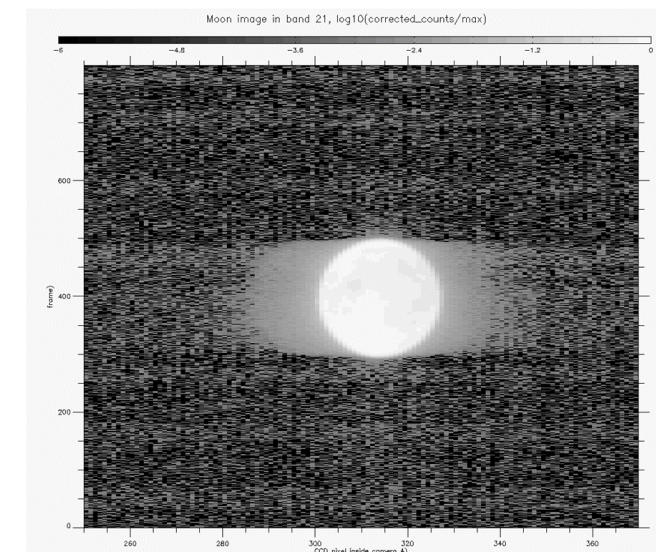


S3 OLCI Moon acquisition (before straylight corr.)

- ➔ Atmospheric correction is very sensitive to physical modelling and spectral sampling
  - › Reference software (e.g. E-Radiate project)
  - › Benchmarking exercises (ACIX, ACIX-2)
  
- ➔ Dedicated surface reflectance validation measurement sites needed
  - › Intermediate step between
    - TOA cal/val sites (such as RadCalNet sites)
    - And land product validation sites (e.g. GBOV, FRM4VEG)
  - › Vegetated sites with variable atmospheric conditions, with characterization of the BRDF
  - › Related work
    - HYPERNETS project



➔ Questions?

Kizljar, Dagestan

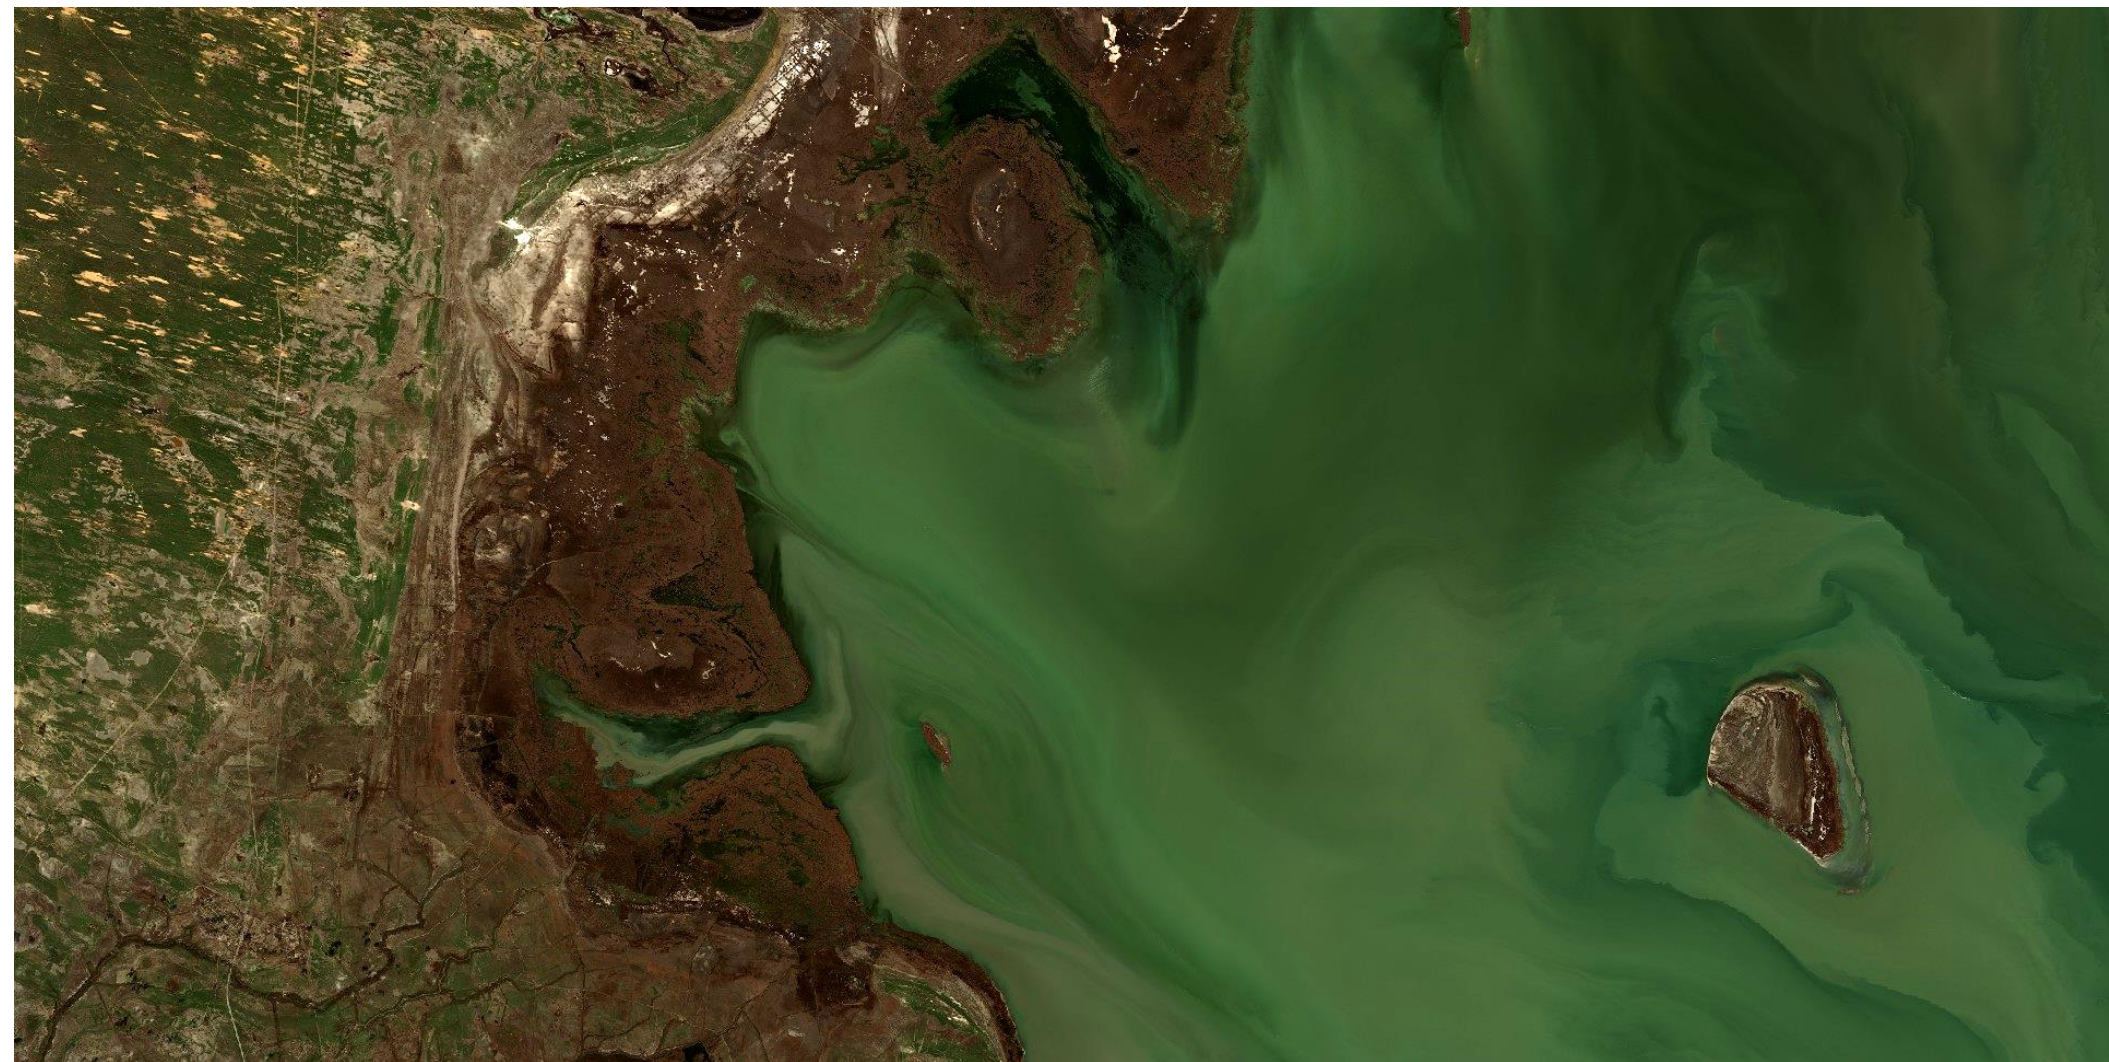

- › The RADCATS data are provided by the NASA Landsat Cal/Val Team as part of the ESA expert users effort