



GRS PROCESSOR: GLINT REMOVAL FOR SENTINEL-2 SCHEME AND APPLICATION TO SENTINEL-2 AND LANDSAT-5, 7, 8

Tristan Harmel (GET, GéoAzur)
Jean-Michel Martinez (GET, IRD)
Nathalie Reynaud (IRSTEA)
Thierry Tormos (AFB)

tristan.harmel@ntymail.com



GRS PROCESSOR: GLINT REMOVAL FOR SENTINEL-2

Content


GRS birth

Theoretical principles

Technical algorithm

Current limitation

Perspectives

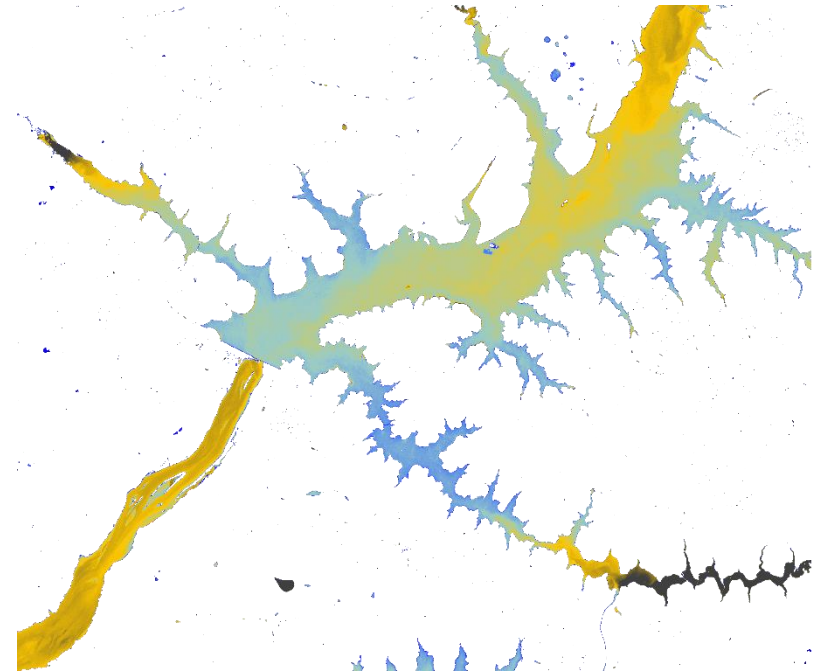

[Image S2A, Amazonian dam and re-suspension]

OBJECTIVES

Observe

Small to great lakes (French reservoirs, ponds, alpine lakes...)

Main rivers and estuaries on watershed scale (Amazonia, Nile, Mekong)

Characterize

Dissolved and particulate matter

Biological activity, micro-algae (e.g., cyanobacteria)

Water quality

Sedimentary mass

Understand and forecast

Coupling observation data with ecological and thermo-dynamic models

Assess anthropological local and global impacts

Sedimentary fluxes

OBJECTIVES

Observe

Characterize

Understand and forecast

**Pre-requisite decametric
satellite observation:**


Sentinel-2 and Landsat-8 best suited to
achieve these goals.

But, we encountered big issues with
atmospheric correction and **the
“stochastic” presence of sunglint.**

**Birth of the
GRS-algorithm**

PRINCIPLES

Simplified picture of the TOA signal over aquatic scene

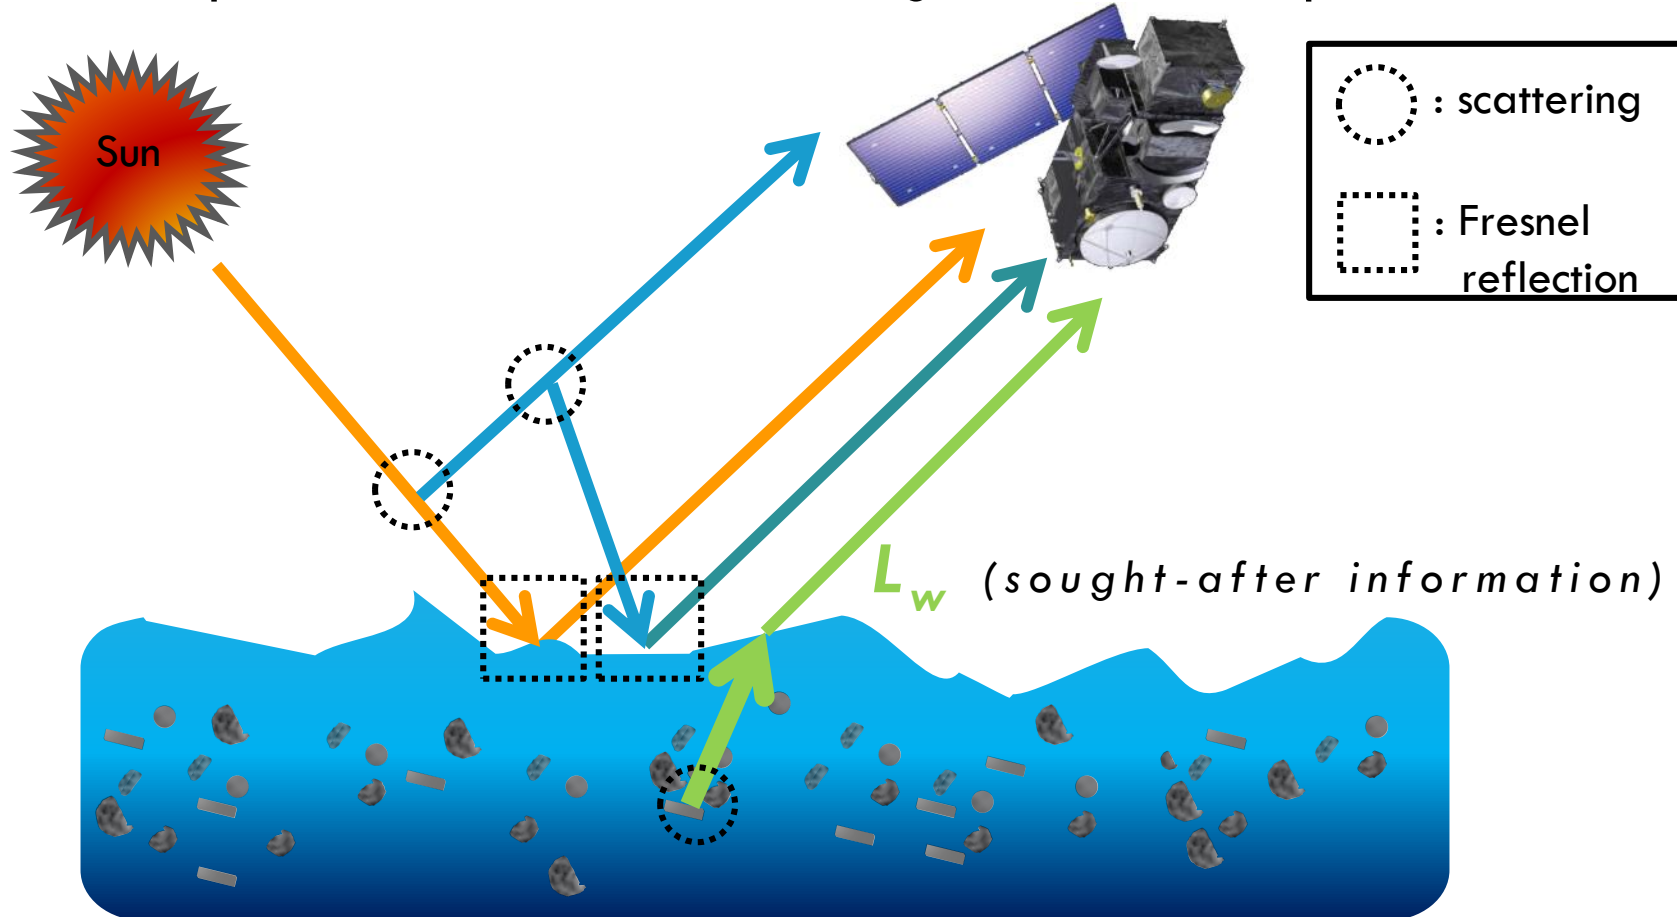


Diffuse light: skylight, reflected skylight and water-leaving radiance

Direct light: sunlint


SUNGLINT EXAMPLES

...from a ship

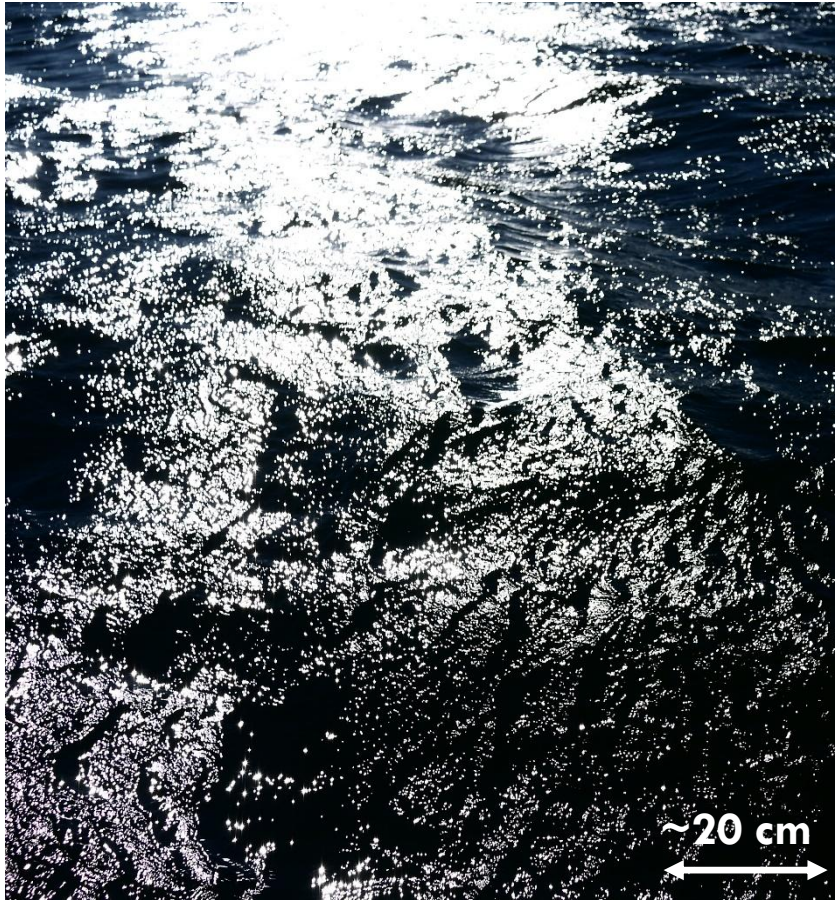

(standard digital camera)


...from a satellite

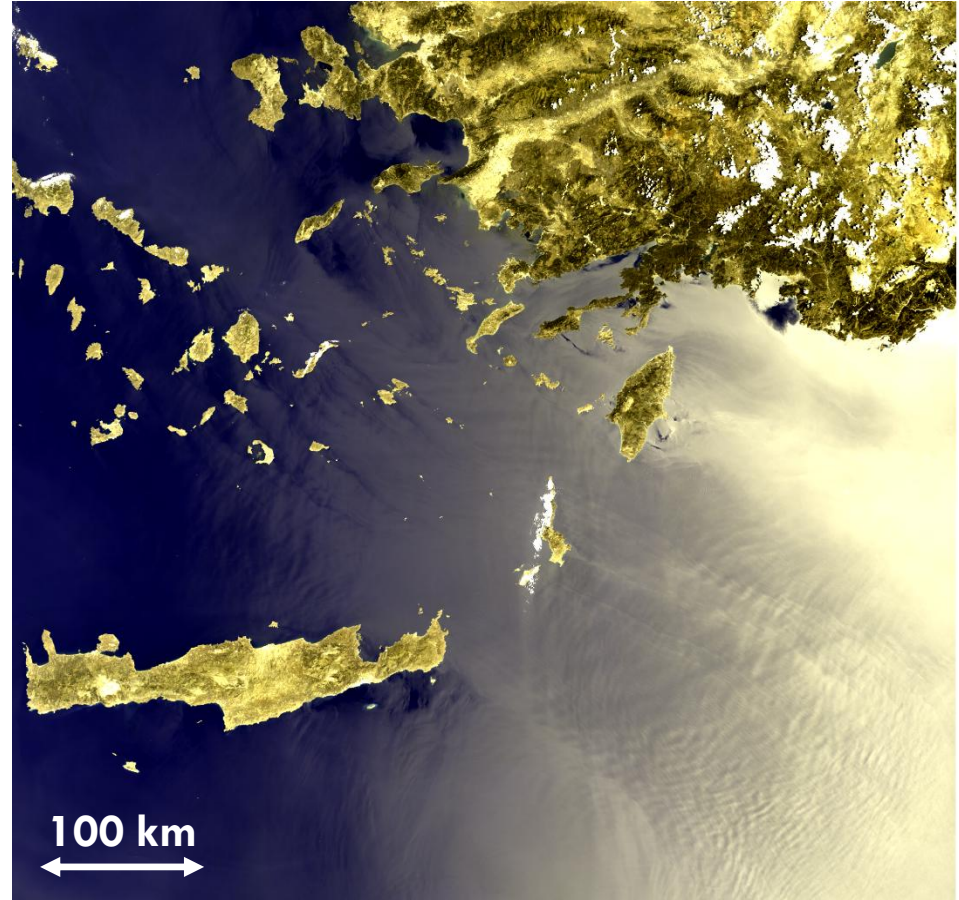

(image Sentinel-3/OLCI, May 10, 2016)


PRINCIPLES

**Landsat / Sentinel-2:
near-nadir view**

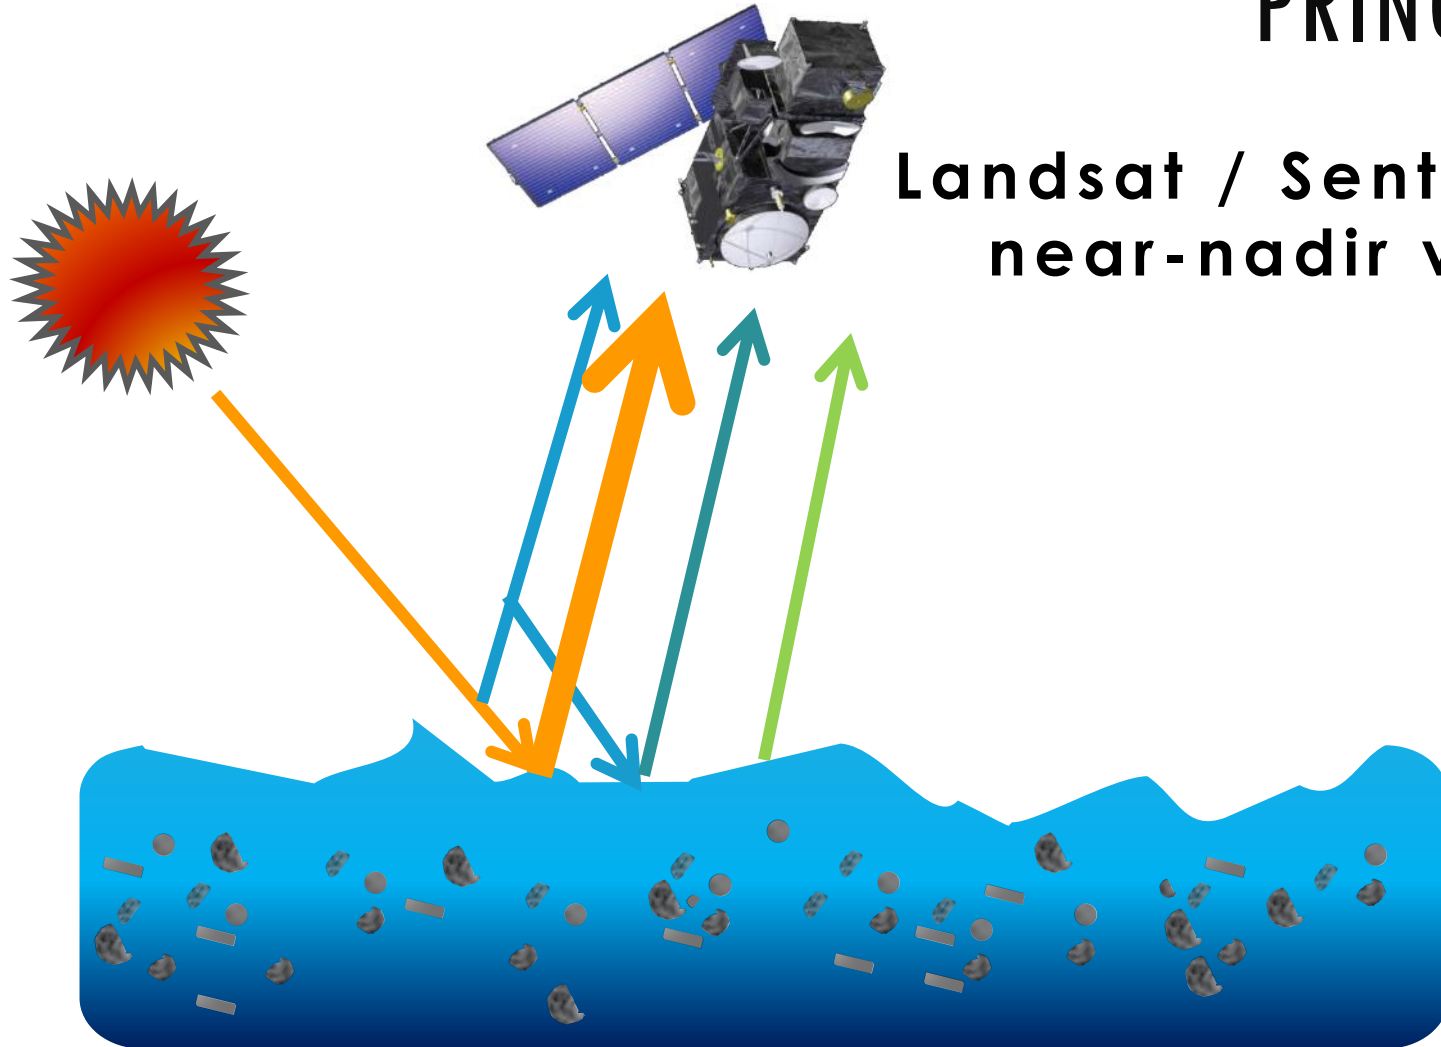

→ Increase probability/intensity of sunglint

PRINCIPLES

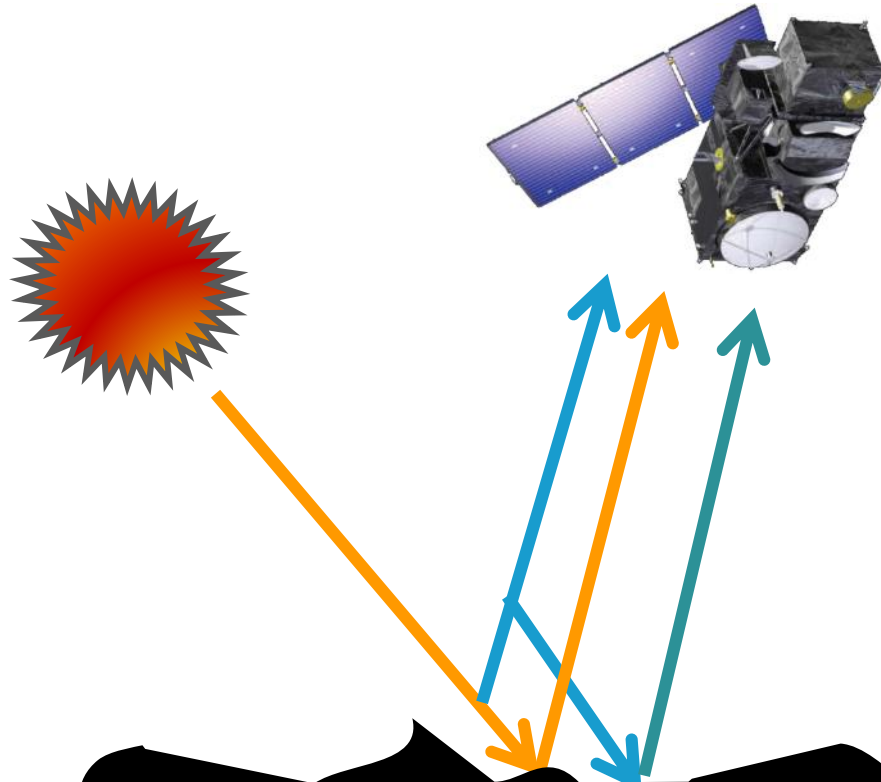

**Landsat / Sentinel-2:
SWIR bands at ~1600
and ~2200 nm**

**SWIR:
Water virtually totally absorbing**

Diffuse light: skylight, reflected skylight

Direct light: sunglint

PRINCIPLES

SUNGLINT IN S2 AND LANDSAT IMAGERY

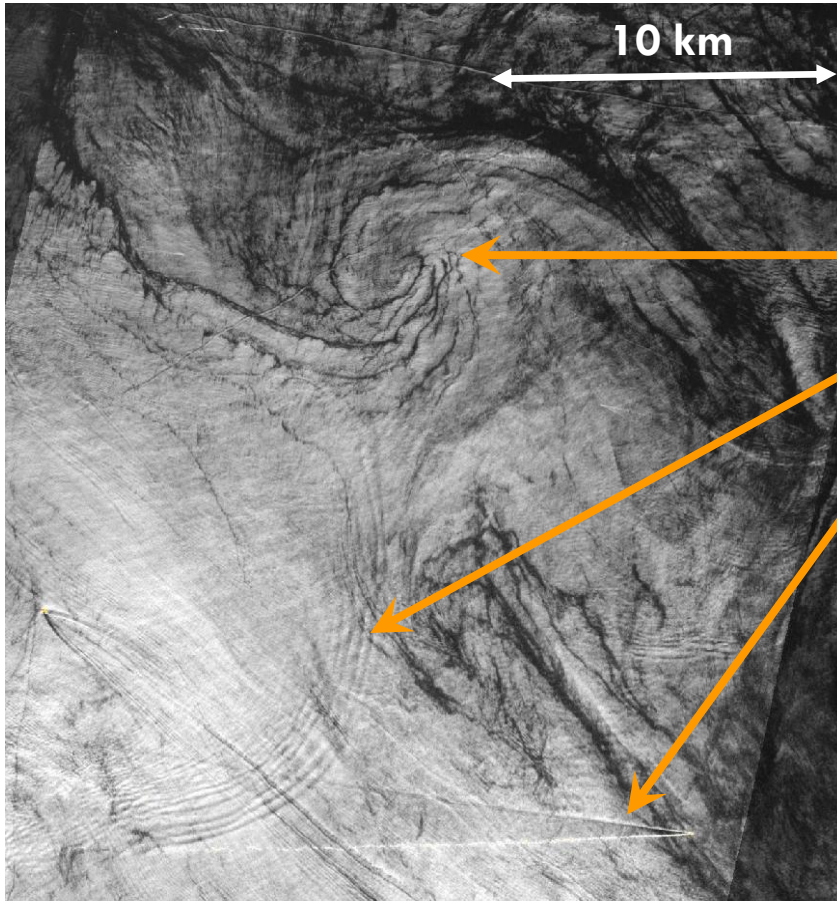


Image Sentinel-2, SWIR-band ($\sim 2200\text{nm}$)

Patterns:


Eddy with surfactant

Wave packet (internals)

Ship wake

...

PRINCIPLES

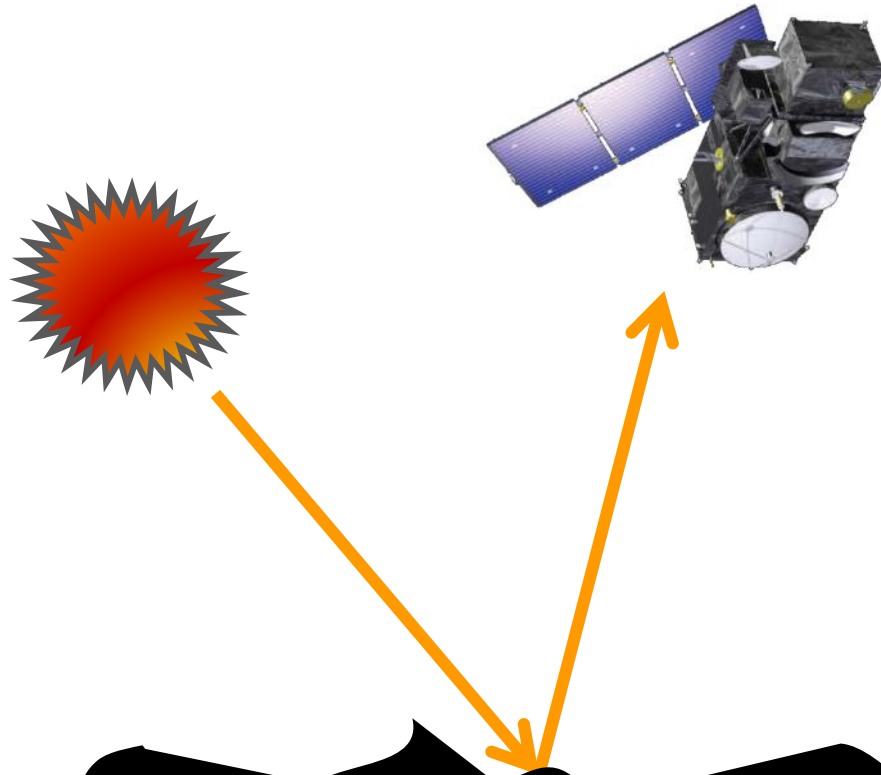

If aerosol known

+

dedicated radiative
transfer code

=

Radiance for skylight and
skylight reflection

SWIR:
Water virtually totally absorbing

SWIR → sunglint (direct light) → BRDF of water surface

PRINCIPLES

sunlint (direct light) radiance

Known →

$$L_g^{TOA}(\theta_s, \theta_v, \Delta\varphi) = \underbrace{T_u(\theta_v) T_d(\theta_s)}_{\text{Upward/downward direct transmittances}} \overbrace{L_{sun}^\downarrow(\theta_s)}^{\text{Sun radiance}} \underbrace{BRDF_{surf}(\theta_s, \theta_v, \Delta\varphi)}_{\text{Bidirectional reflectance distribution function}}$$

Unknown →

Upward/downward
direct transmittances

Bidirectional reflectance
distribution function

$$T(\theta) = \exp\left(-\frac{\tau_{mol} + \tau_a}{\cos\theta}\right)$$

θ_s : Sun zenith angle
 θ_v : Viewing zenith angle
 $\Delta\varphi$: Relative azimuth
 (view-Sun)
 τ : optical thickness
 (molecules / aerosols)

PRINCIPLES

SWIR → sunglint (direct light) → BRDF of water surface

Independent of wavelength →

Geometrical
consideration

Wave slopes statistics
and shadowing

$$BRDF_{surf} = R_f(\omega) \frac{\pi}{4 \cos \theta_v \cos^4 \theta_N} q(\zeta_x, \zeta_y, h)$$

Fresnel coefficient





dependent on refractive index
of water, $n(\lambda)$

← Wavelength dependent

PRINCIPLES


Spectral dependence of refractive index, n , over visible-SWIR region

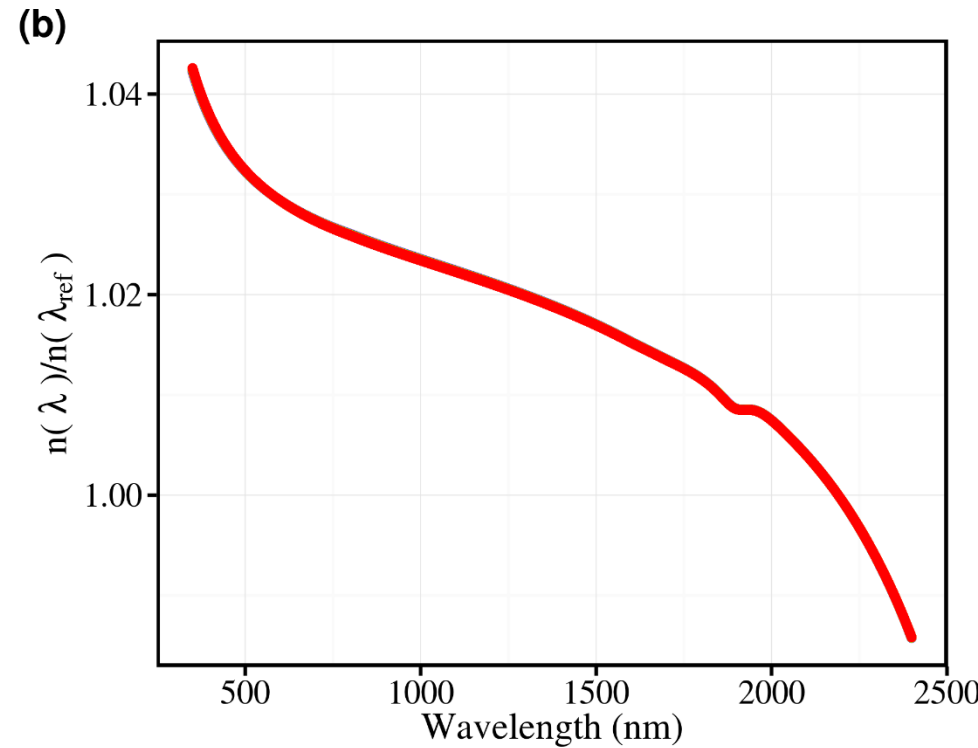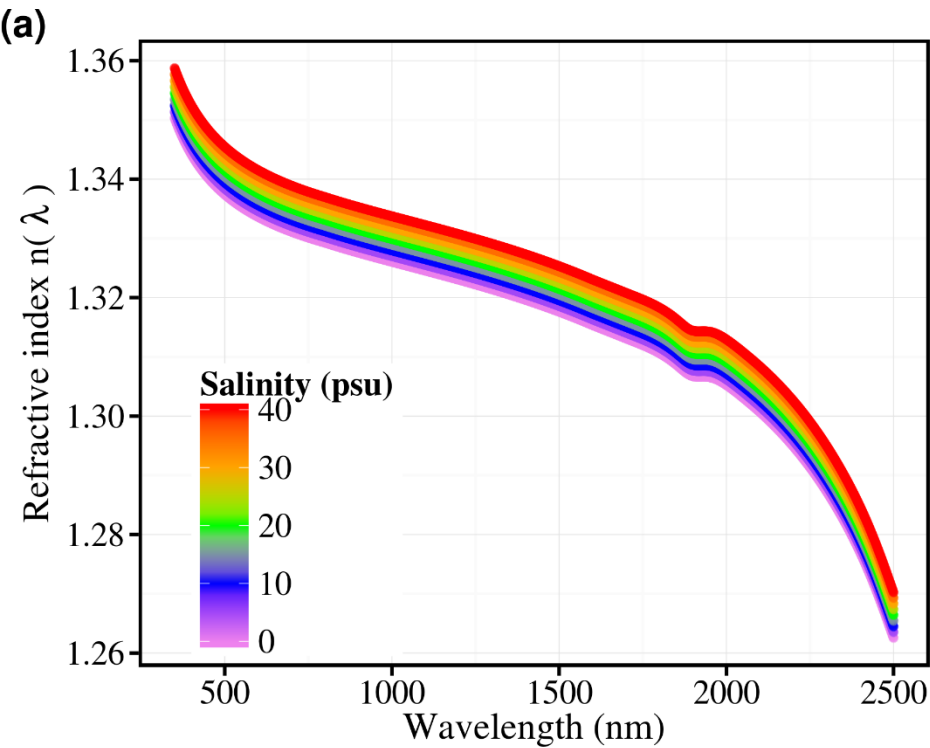

→ Spectral variation of a few percent

PRINCIPLES

$n(\lambda) \rightarrow$ spectral variation of *BRDF* of water surface
(b)

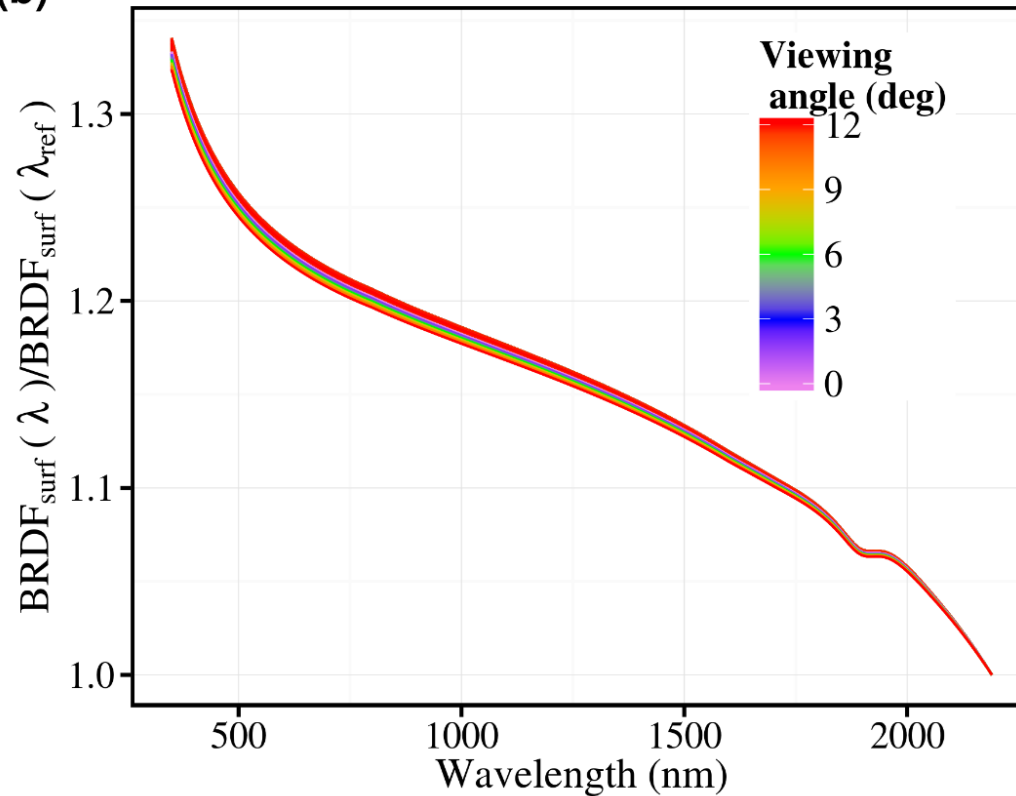

\rightarrow Spectral variation of more than 30% from SWIR to blue


\rightarrow must be accounted for to extrapolate BRDF retrieved in the SWIR

GRS ALGORITHM


(GLINT REMOVAL FOR SENTINEL-2-LIKE DATA)

GRS: coded in python and fortran, main lib: snappy (ESA)

Can process: Sentinel-2 A & B, Landsat 5, 7 & 8

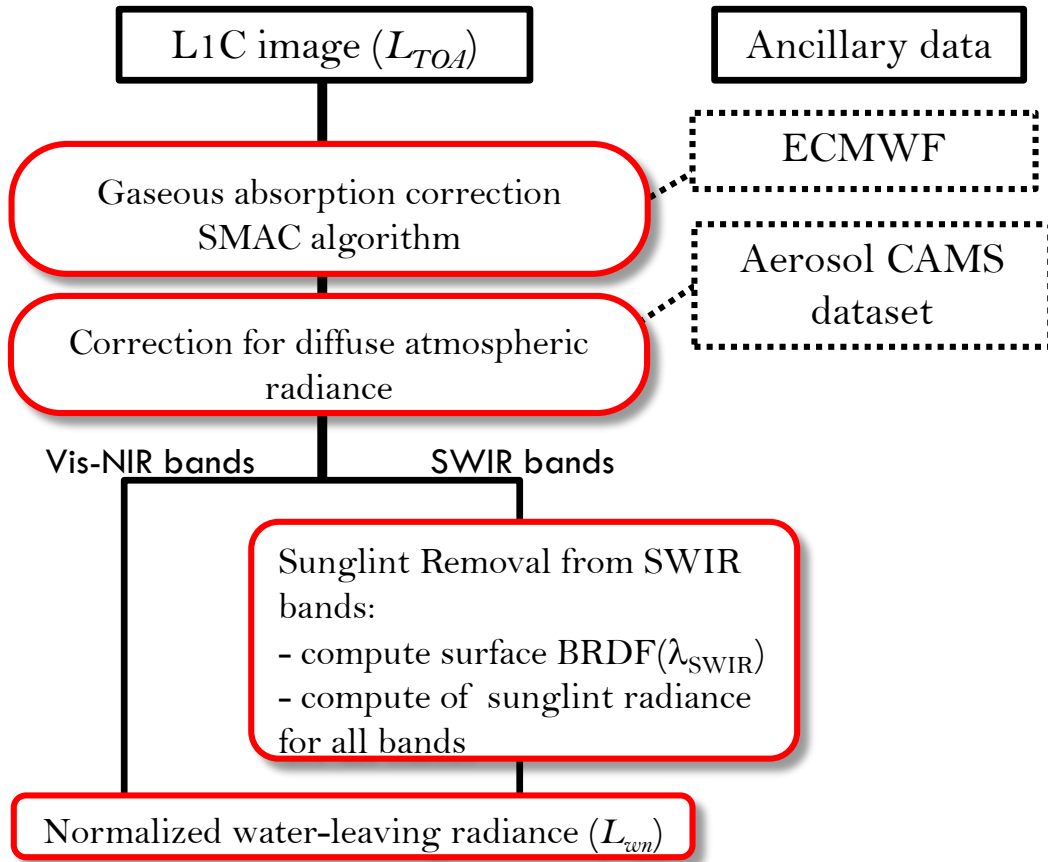


[Harmel et al., 2018]

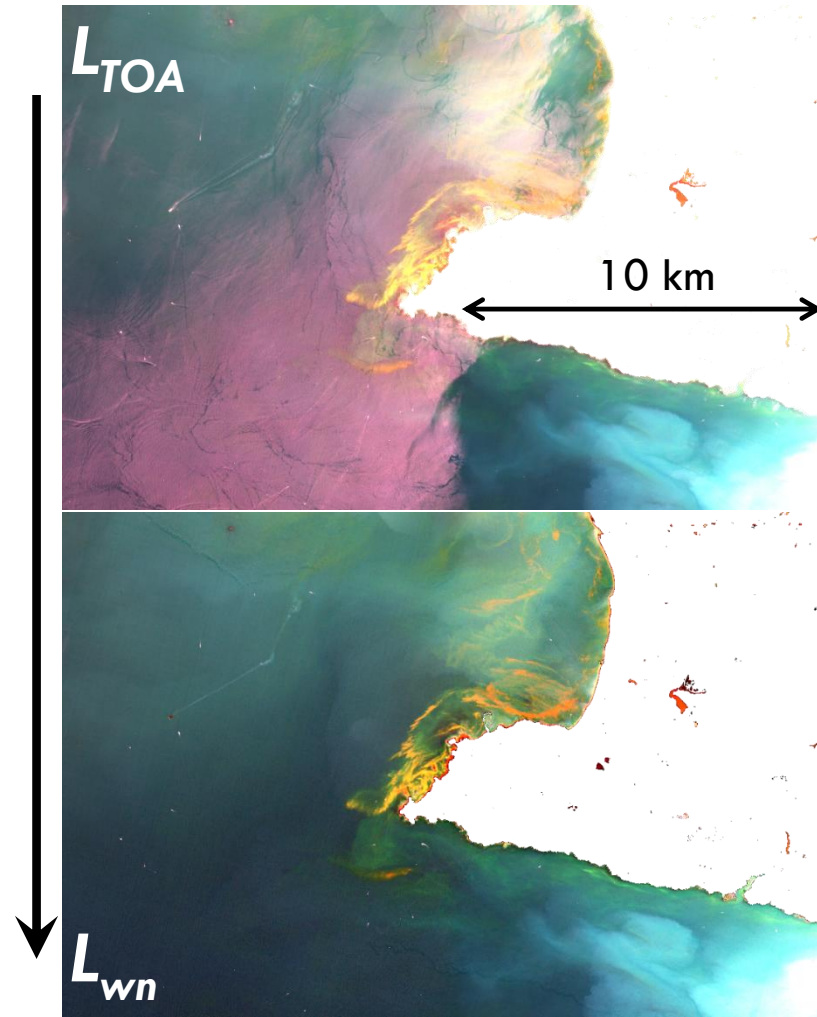

Sentinel-2 image of 5 Aug. 2018, [2°W, 47°N]
15

GRS ALGORITHM

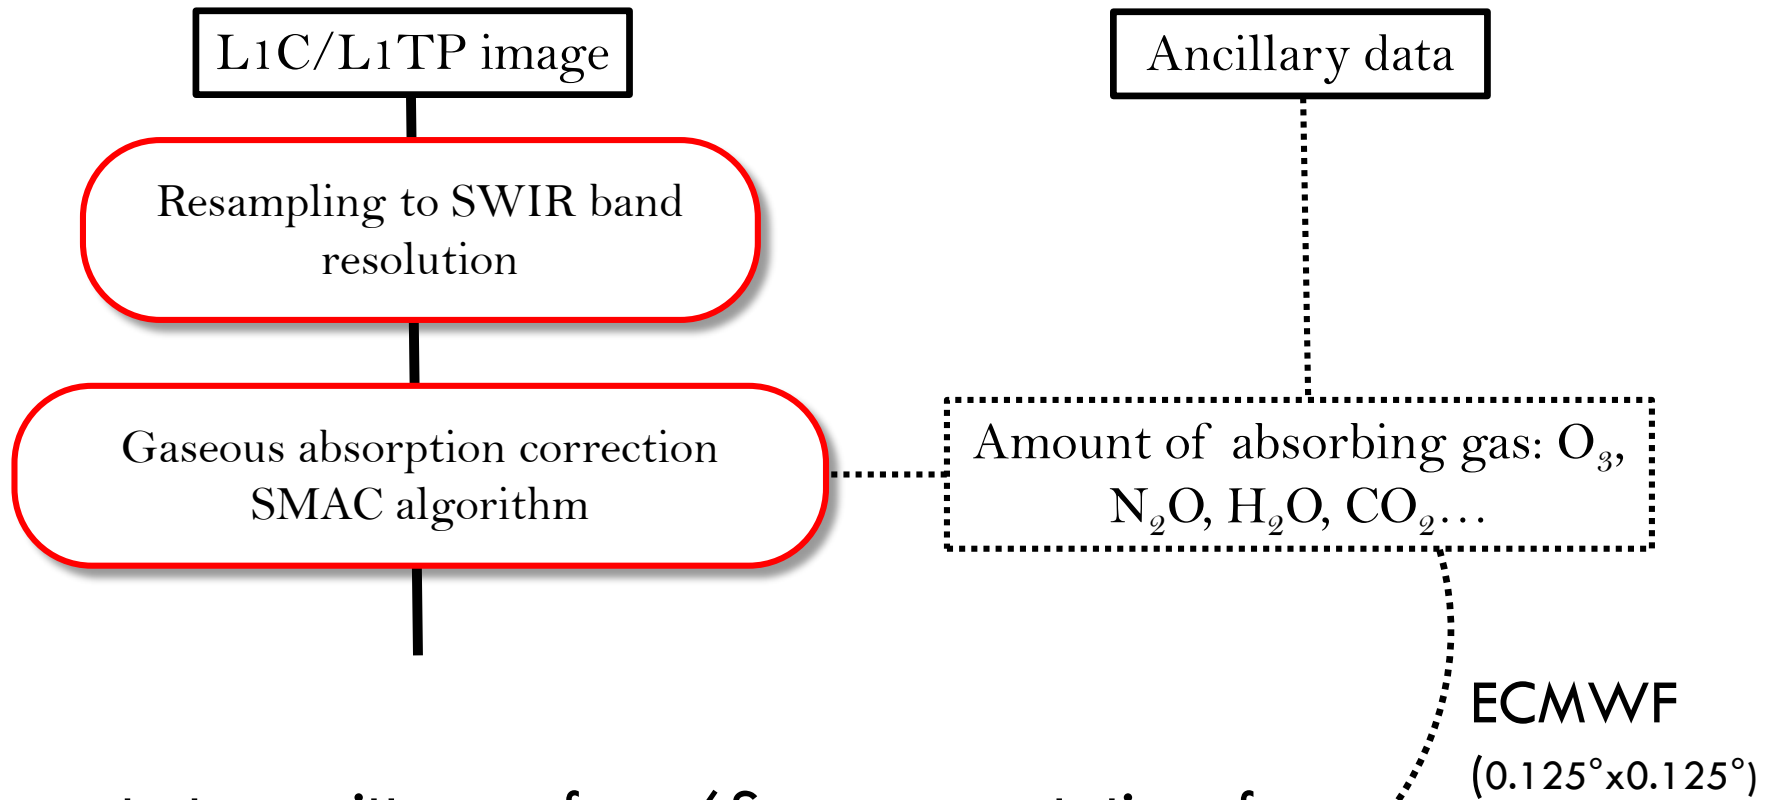

Compute transmittances from 6S pre-computations for:

- A given atmospheric profile
- absorbing gas concentrations
- satellite bands characteristics

GRS ALGORITHM

Ancillary data

Aerosol optical thickness

Correction for diffuse atmospheric radiance

$$\log(\tau_a(\lambda)) = a_0 + a_1 \log(\lambda) + a_2 \log(\lambda)^2$$

← Ancillary (CAMS)

$$\tau_{a_sim}(\lambda) = \gamma \tau_{a_sim}^{fine}(\lambda) + (1 - \gamma) \tau_{a_sim}^{coarse}(\lambda)$$

← LUT

Optimal fit to obtain γ and compute the sky + reflected sky radiance:

$$L_{sky}(\lambda, \tau_a) = \gamma L_{sky}^{fine}(\lambda, \tau_a) + (1 - \gamma) L_{sky}^{coarse}(\lambda, \tau_a)$$

Interpolated
within LUT

GRS ALGORITHM

Ancillary data

Aerosol optical thickness

Correction for diffuse atmospheric radiance

LUT: simulations from OSOAA code [Chami et al., 2015]
 Atmosphere/rough interface/water coupled system.
 Polarization accounted for.
 Aerosol models (size lognormal, Mie calculations):


	r_g (μm)	σ	r_{eff} (μm)	n_r	n_i
fine	0.10	0.60	0.25	1.40	0.002
coarse	0.80	0.60	1.98	1.35	0.001

$$L_{sky}(\lambda, \tau_a) = \gamma L_{sky}^{fine}(\lambda, \tau_a) + (1 - \gamma) L_{sky}^{coarse}(\lambda, \tau_a)$$



Interpolated
within LUT

GRS ALGORITHM

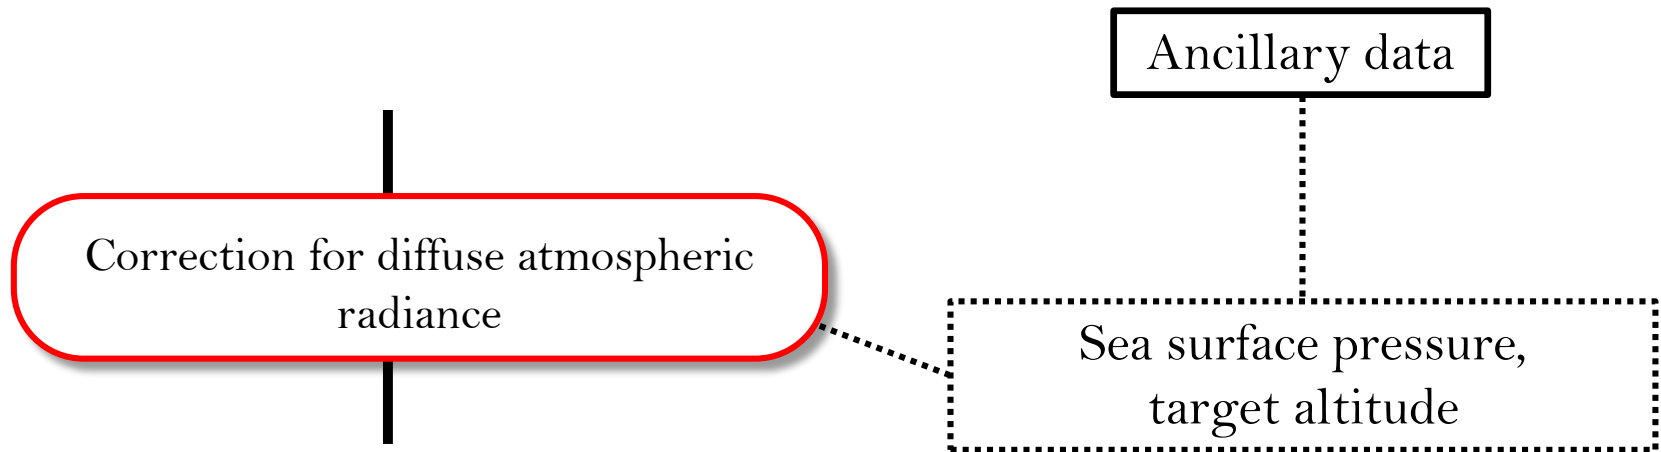


Effect of atmosphere thickness (e.g., elevated target):

$$P(h) = P(0) \left[1 - \frac{0.0065 h}{288.15} \right]^{5.255}$$

Sea level pressure (ECMWF) points to $P(0)$. Target altitude (m) points to h .

Rayleigh optical thickness and radiance from LUT recalibrated on $P(h)$

GRS ALGORITHM

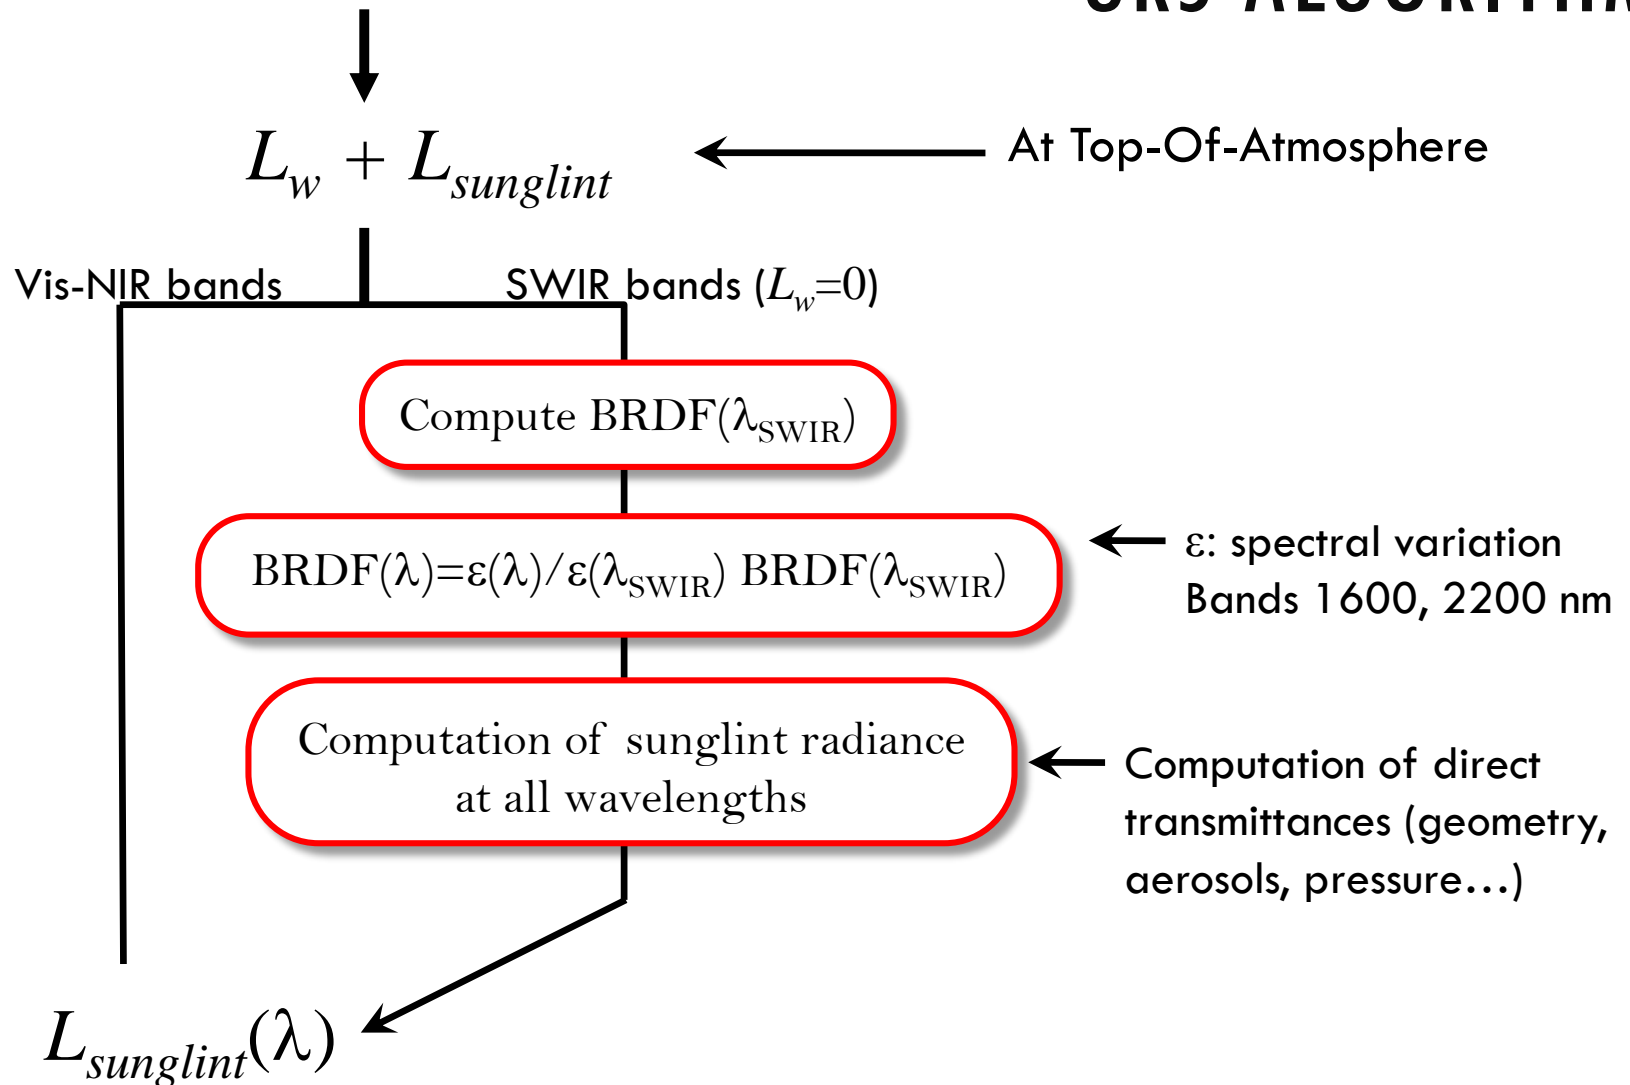

GRS ALGORITHM

Correction for sunglint radiance



L_w



At Top-Of-Atmosphere

Normalized water-leaving
radiance L_{WN}

Correction for Sun-Earth distance



$$L_{WN}(\theta_v, \Delta\varphi) = \left(\frac{R}{R_0} \right)^2 \frac{L_w^{TOA}(\theta_s, \theta_v, \Delta\varphi)}{t_d(\theta_s) \cos \theta_s}$$




Upwelling diffuse + direct transmittance




No bidirectional
correction for L_{WN}

GRS ALGORITHM IMPLEMENTED FOR S2 AND LANDSAT SERIES

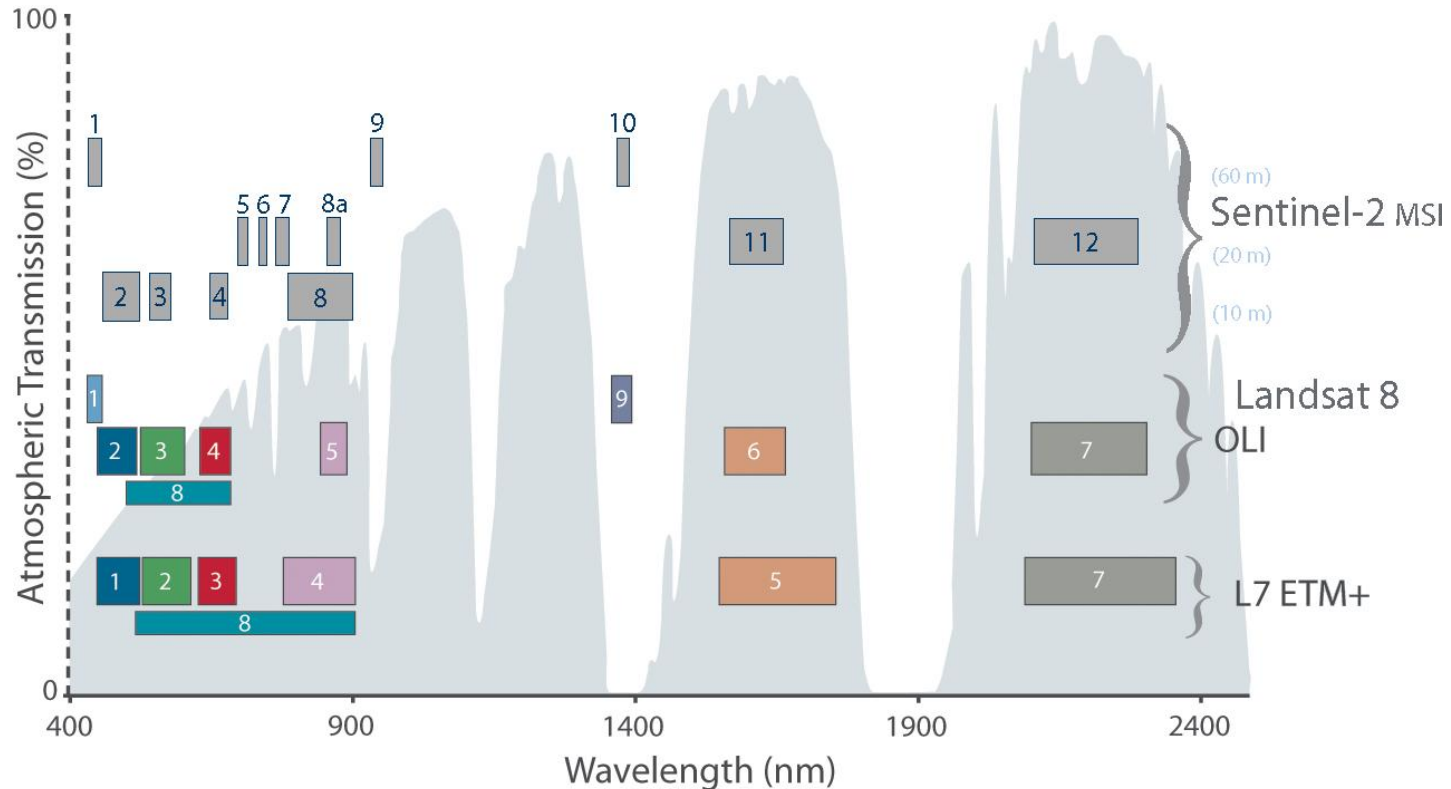

- All parameters calculated for the RSR of the sensors (Landsat-5, 7, 8 and Seninel-2 A/B)
- Time range limited by CAMS data availability (2003-present)

VALIDATION WITH AERONET-OC DATA

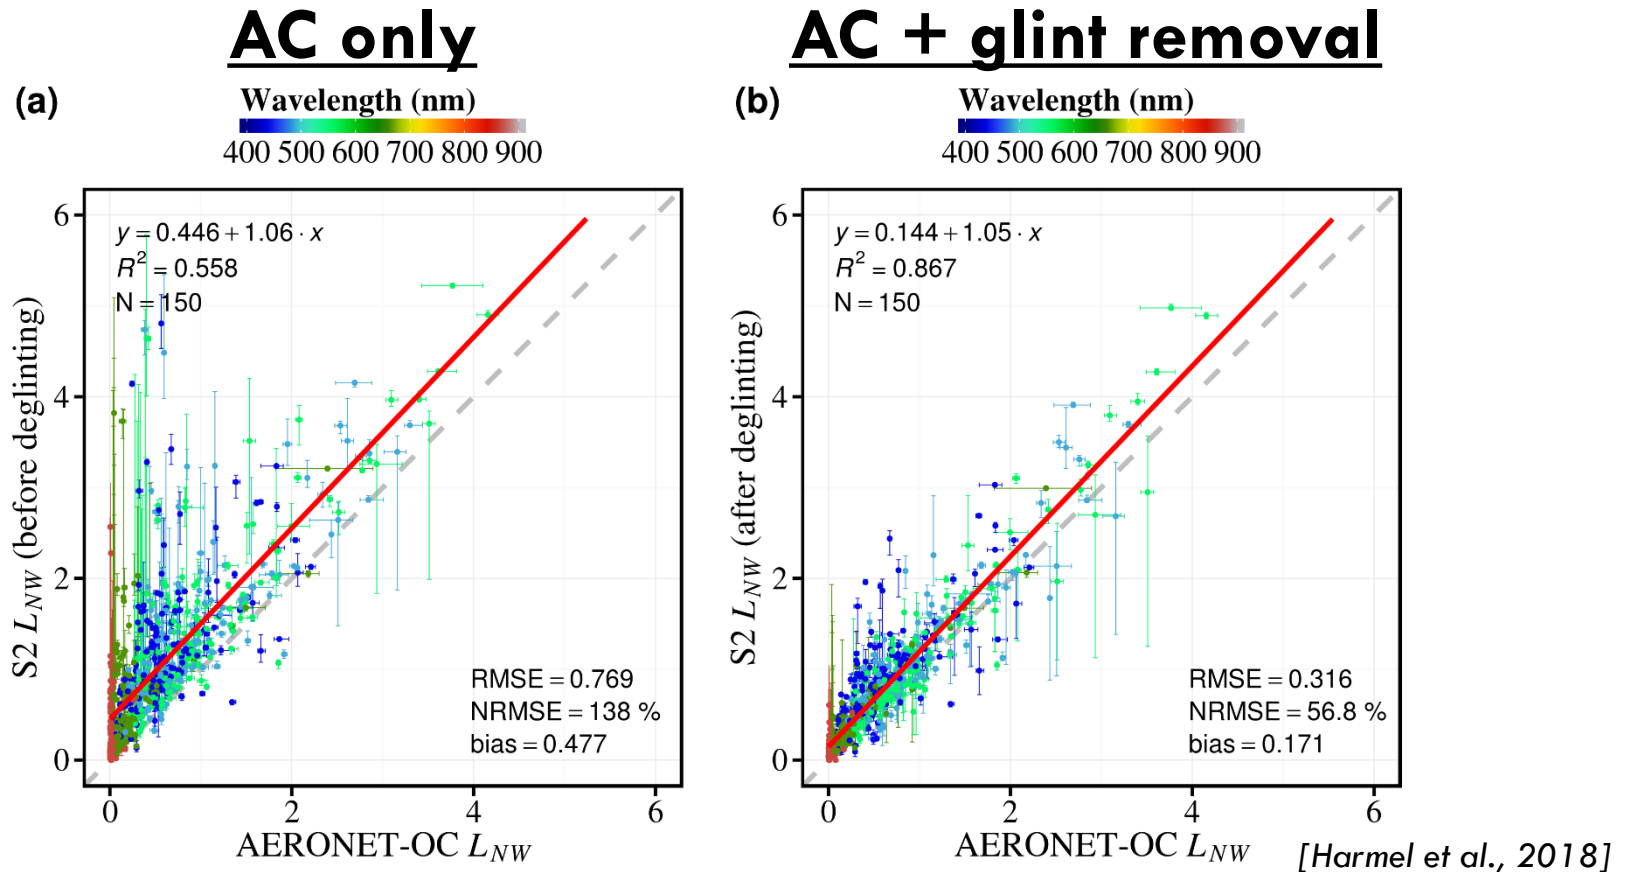


150 satellite images (S2)


16 AERONET-OC (14 coastal, 2 lake sites)

CURRENT LIMITATIONS


- Not coupled yet with masking procedure: “water”, “clouds”, “cloud shadow”, “cliff shadow”...
- Need of exogenous data for aerosols (e.g., spectral optical thickness)
- Differences in viewing angles between spectral bands are not accounted for at the pixel level

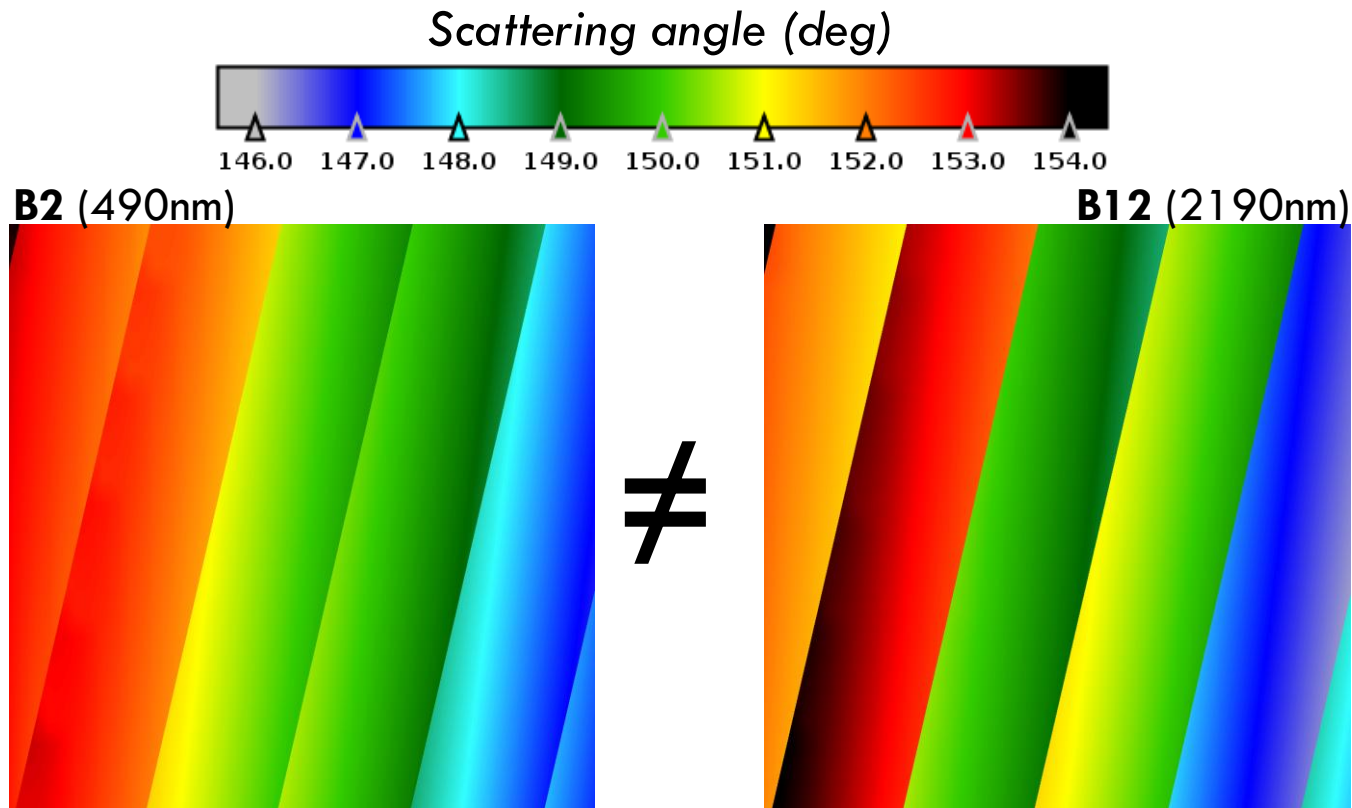

CURRENT LIMITATIONS

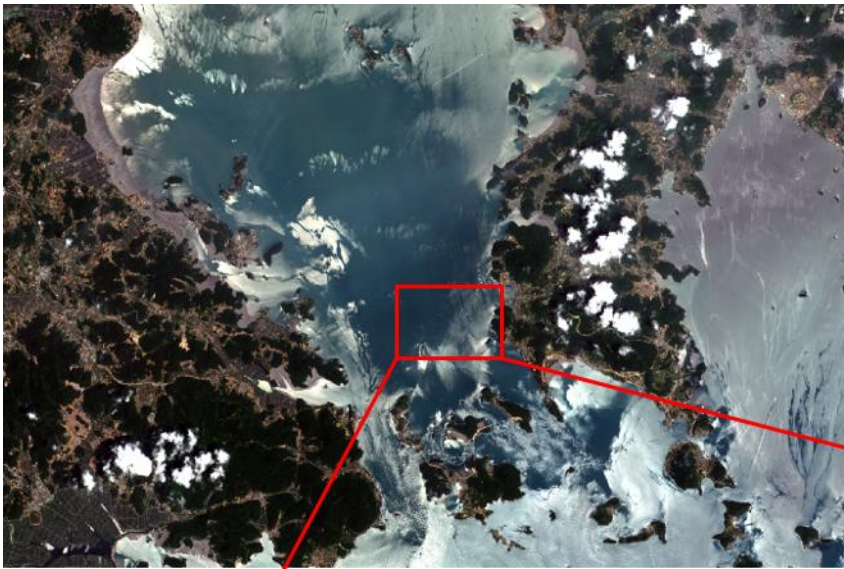


Example of RGB S2A image where glinted pixels appear red, green and blue due to potential mis-coregistration, **time lag between band acquisition or changes in viewing angles between bands.**

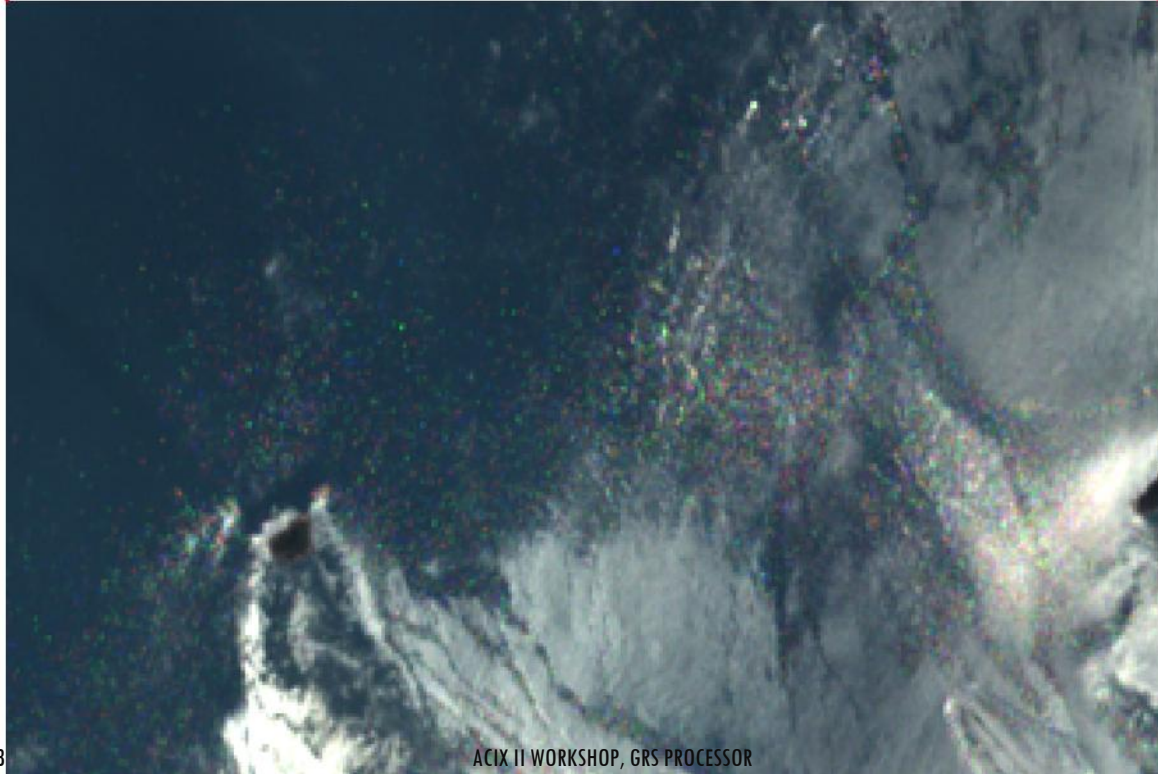

PERSPECTIVES

- Coupling with detection chain for “water” and “mixed” pixels
- Exploitation of directional information from each spectral band and “multi-view” pixels (**need of LIB data**)
- Development of a coupled estimation of sunglint and aerosol (retrieval from direct and diffuse light)
- Coupling with SWOT data (→ sedimentary fluxes over 150 pre-defined sites)
- Evaluation of performances from public and our Cal/Val in situ data

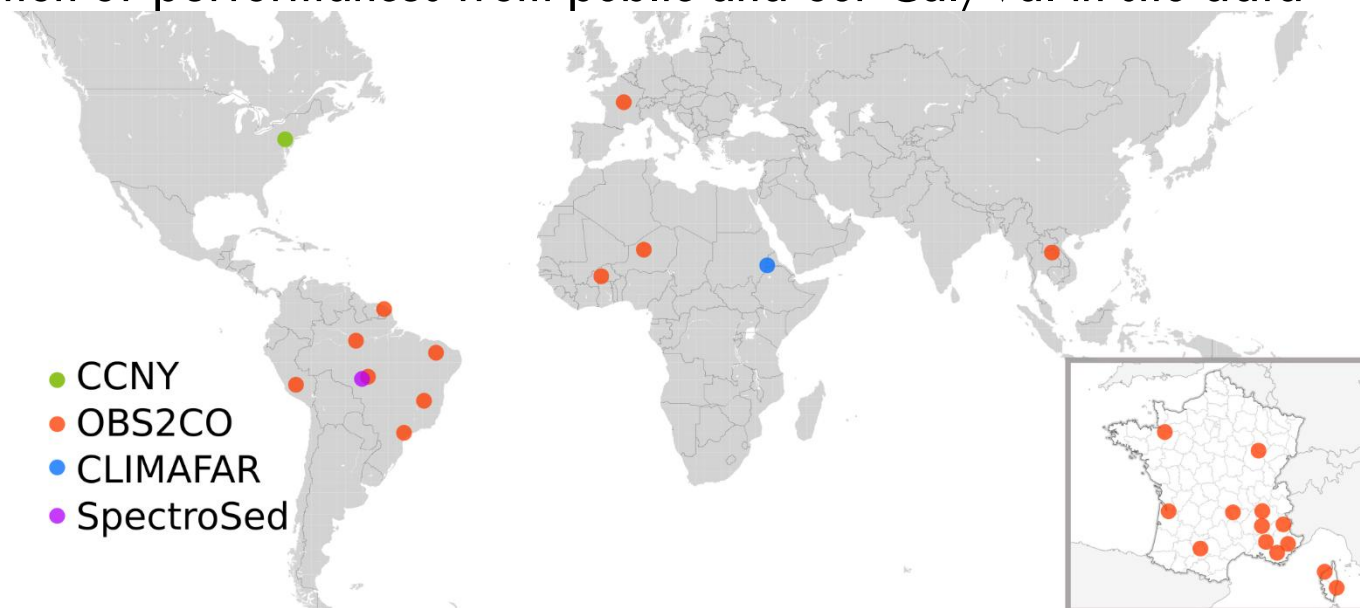



AGENCE FRANÇAISE
POUR LA BIODIVERSITÉ

MINISTÈRE DE L'ENVIRONNEMENT

French National Research
Institute for Sustainable
Development



Institut de Recherche
pour le Développement
FRANCE



Contact: tristan.harmel@ntymail.fr



THANK YOU